


PRODUCT SPECIFICATIONS

- Material:** Plastic
- Colour:** White
- LED Strip Type:** Single Colour
- No. of Channels:** 4
- Input Voltage:** 12v DC or 24v DC
- Output Signal:** 2.4Ghz
- Output Power:** 4CH x 5A (240w or 480w)
- Transmitting Range:** Up to 30m
- IP Rating:** IP20
- Dimmable:** Yes (0.1% - 100%)
- Warranty:** 2 Years Replacement**



DIMENSIONS

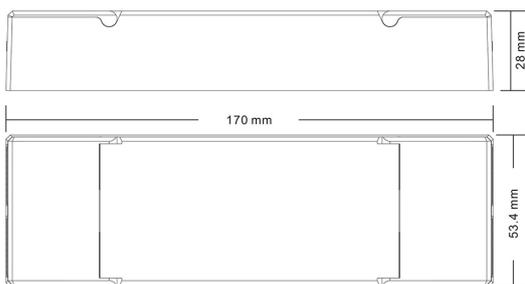

COMPATIBLE WITH




- HV9101-ZB-5C
- HV9101-ZB-SCTP
- HV9102-ZB-SCREM

IP RATING



OPERATING INSTRUCTIONS

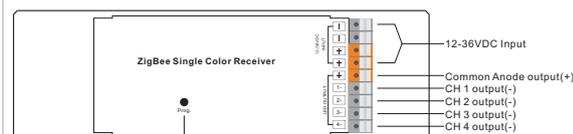

Program Key: short press to switch on/off the device, press and hold down to increase/decrease light intensity

Product Data

| No. | Input Voltage | Output Current | Output Power | Output Type | Dimension (LxWxH) |
|-----|---------------|----------------|--------------|------------------|-------------------|
| 1 | 12-36VDC | 4CH, 5A/CH | 240-720W | Constant voltage | 170x53.4x28mm |

Product Ordering

IMAGE



PART NUMBER


HV9105-ZB-DIM

SAMPLE INSTALLATION DIAGRAM

4. TouchLink to a Zigbee Remote

Step 1: Method 1: Short press "Prog" button (or re-power on the device) 4 times to start TouchLink commissioning immediately, 1805 timeout, repeat the operation.

Method 2: Re-power on the device, TouchLink commissioning will start after 155 if it's not added to a zigbee network, 1655 timeout. Or start immediately if it's already added to a network, 1805 timeout. Once timeout, repeat the operation.

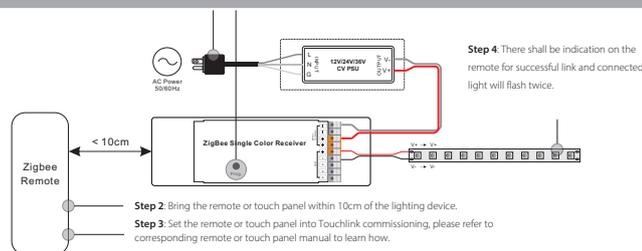

Note: 1) Directly TouchLink (both not added to a ZigBee network), each device can link with 1 remote.

- 2) TouchLink after both added to a ZigBee network, each device can link with max. 30 remotes.
- 3) For Hue Bridge & Amazon Echo Plus, add remote and device to network first then TouchLink.
- 4) After TouchLink, the device can be controlled by the linked remotes.

** See Warranty Terms and Conditions for more information

For more information contact Havit Lighting

ADDRESS:
143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
web: www.havit.com.au