

Pinta Aluminium Black

- Surface mounted eyelid & louvred step light
- Aluminium Poly Powder Coated Black
- Tempered glass
- IP Rating: IP65

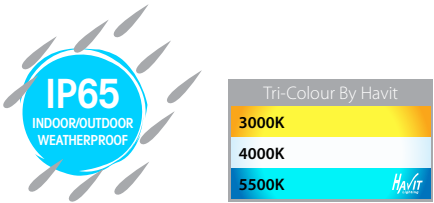


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV2921	NA	NA	240v	No globes supplied
	HV2922	NA	NA	12v	No globes supplied
	HV2923T	3000K 4000K 5500K	160lm 170lm 180lm	240v	Tri-Colour Built-in 2.3w LED
	HV2924T	3000K 4000K 5500K	160lm 170lm 180lm	12v DC	Tri-Colour Built-in 2.3w LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV2925T-12V	3000K 4000K 5500K	160lm 170lm 180lm	12v DC	Tri-Colour Built-in 2.3w LED
OPTIONAL GLOBES					
Optional G9 LED globe HV9511W to suit HV2921 		Optional G4 LED globe HV9529-3.2w to suit HV2922 			

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336



All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336