Bata Stainless Steel

- Brick light with plain face & grill cover
- Stainless Steel 316 Marine Grade Cover And Stainless Steel Poly Powder Coated Black Cover
- Powder coated die cast aluminium body
- Cutout with Canister: 238mm x 100mm
- Installation Depth: 90mm
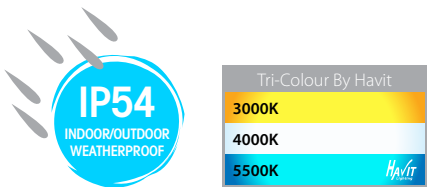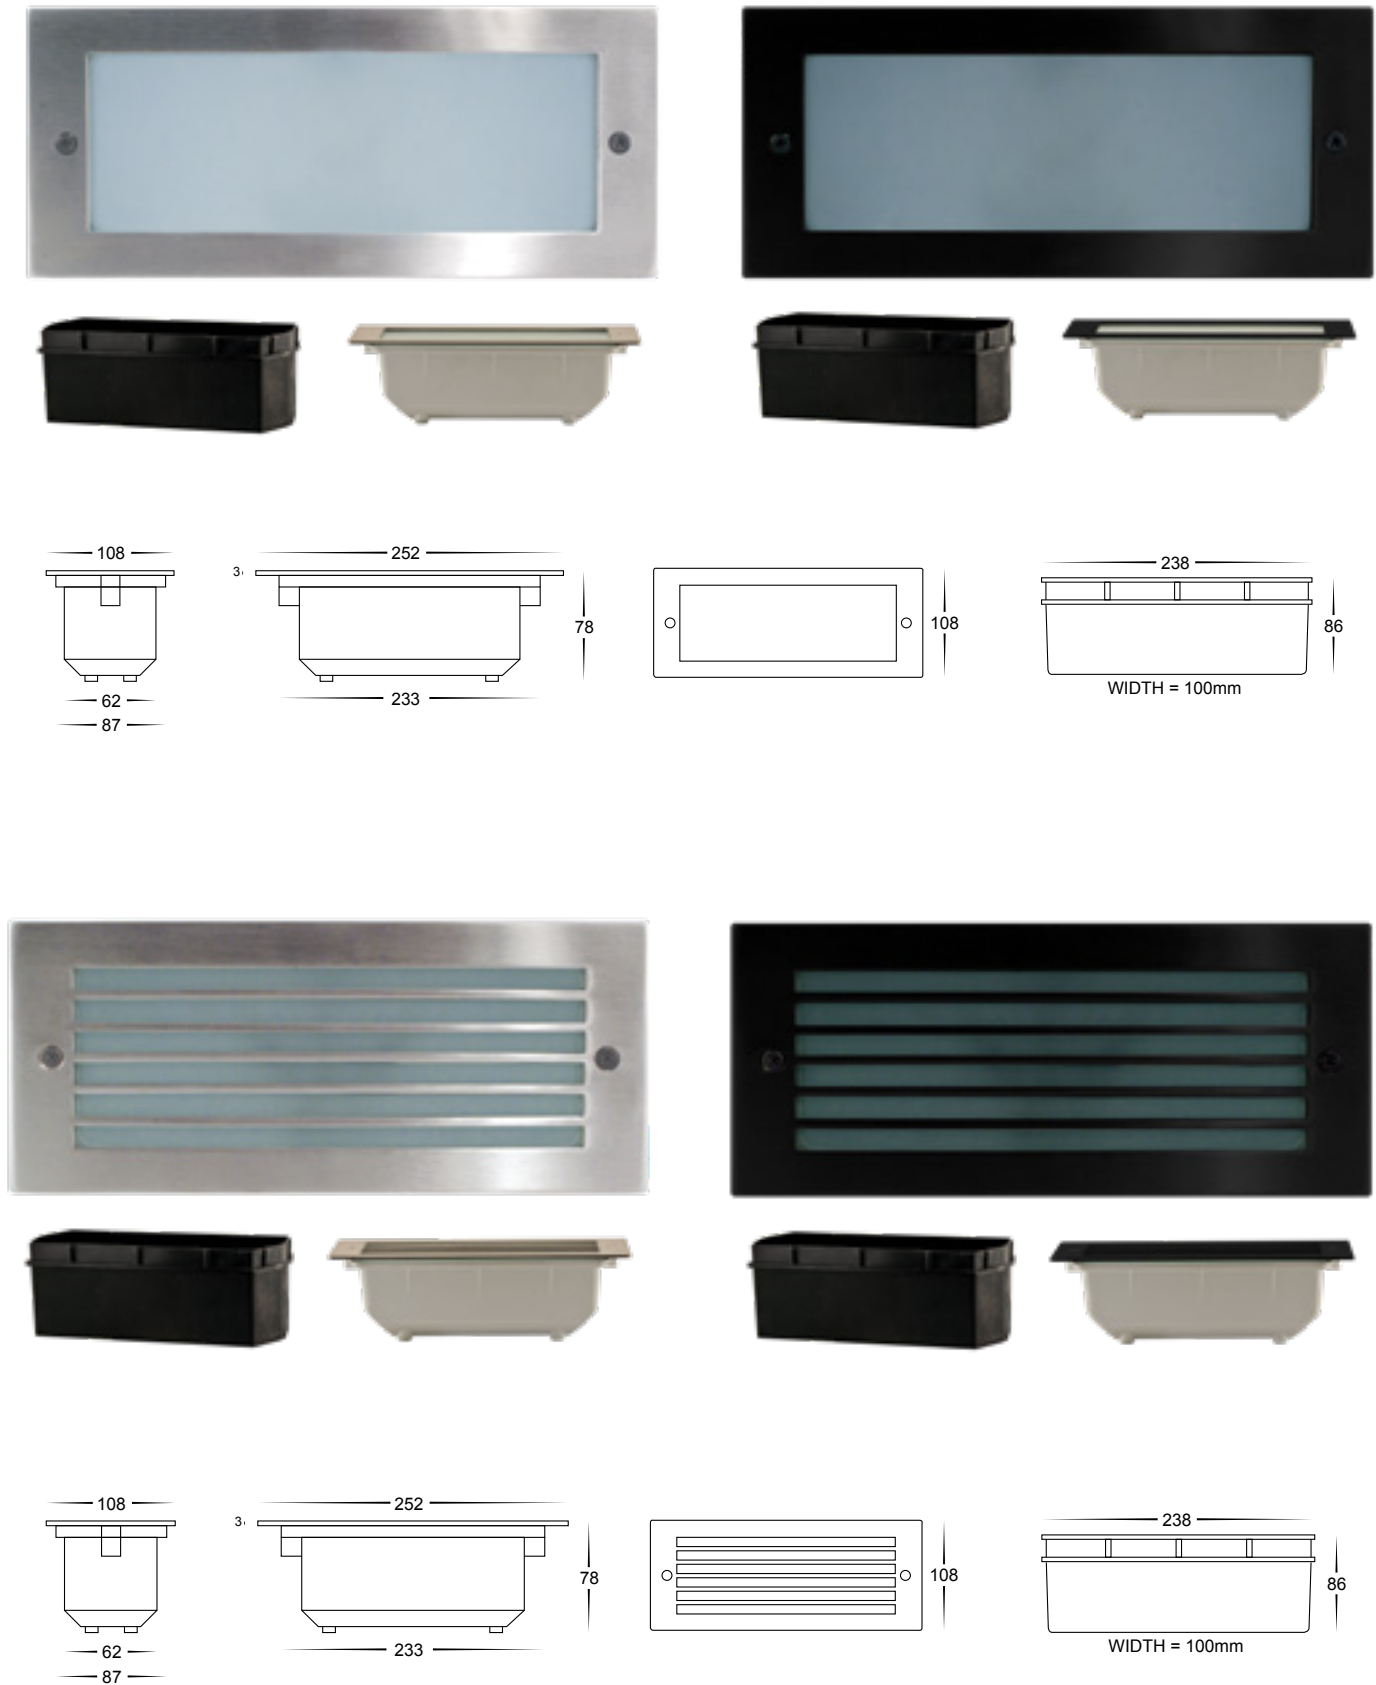- Frosted tempered glass
- IP Rating: IP54

IP54
INDOOR/OUTDOOR WEATHERPROOF

Tri-Colour By Havit
| 3000K |
| 4000K |
| 5500K |

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3003T-SS316	3000K 4000K 5500K	800lm 850lm 900lm	240v	**Tri-Colour** Built-in 10w LED
	HV3003T-SS316-12V			12v DC	**Tri-Colour** Built-in 10w LED

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3003T-BLK	3000K 4000K 5500K	800lm 850lm 900lm	240v	**Tri-Colour** Built-in 10w LED
	HV3003T-BLK-12V			12v DC	**Tri-Colour** Built-in 10w LED

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3004T-SS316	3000K 4000K 5500K	800lm 850lm 900lm	240v	**Tri-Colour** Built-in 10w LED
	HV3004T-SS316-12V			12v DC	**Tri-Colour** Built-in 10w LED

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3004T-BLK	3000K 4000K 5500K	800lm 850lm 900lm	240v	**Tri-Colour** Built-in 10w LED
	HV3004T-BLK-12V			12v DC	**Tri-Colour** Built-in 10w LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336