

Seevive

- Rectangle surface mounted step light
- PC Black & White
- IP Rating: IP65

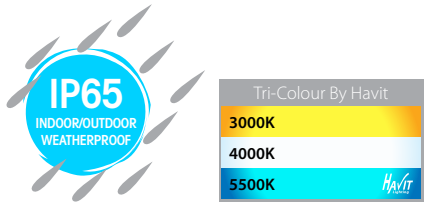
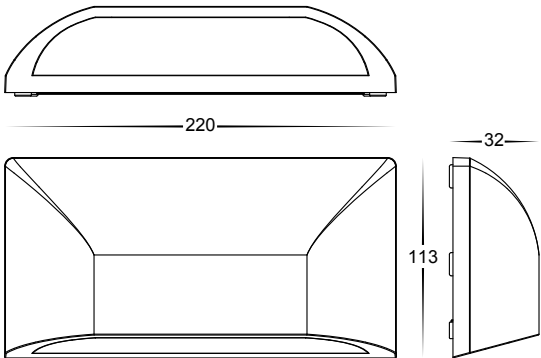


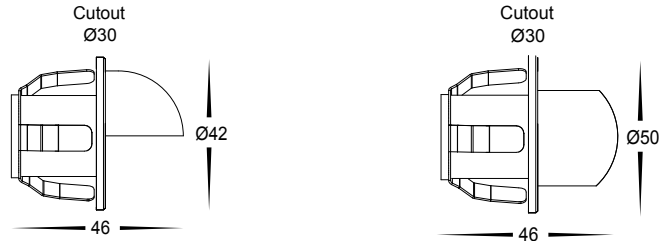
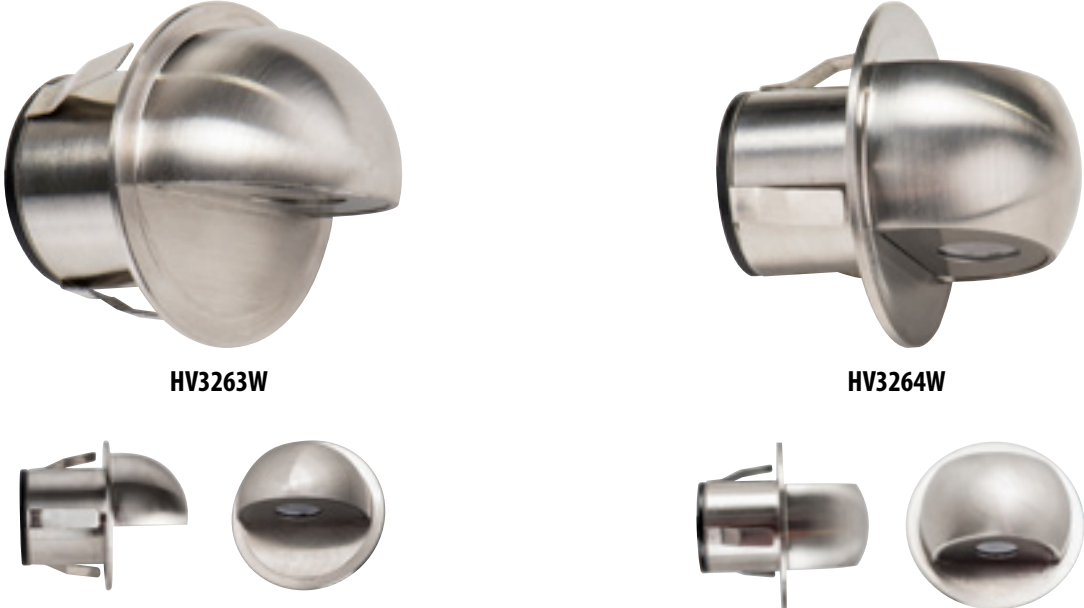


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3225T-BLK	3000K 4000K 5500K	150lm 155lm 160lm	12v DC	Tri-Colour Built-in 5w SMD LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3225T-WHT	3000K 4000K 5500K	150lm 155lm 160lm	12v DC	Tri-Colour Built-in 5w SMD LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336



Sako 316 Stainless Steel

- Recessed mini step lights
- 316 Stainless Steel
- 30° beam angle
- Cut out: 30mm
- Installation depth: 40mm
- IP Rating: IP67



IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3263W	3000k	100lm	12v DC	Built-in 1.5w COB
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3264W	3000k	2x 70lm	12v DC	Built-in 2w COB

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336