

Taso Aluminium Black

- Surface mounted step light
- Aluminium Poly Powder Coated Black
- PC Diffuser
- IP Rating: IP54



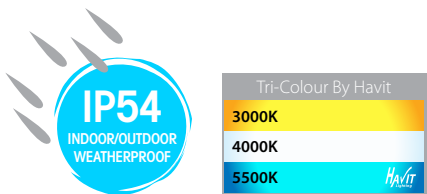


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3270T-BLK-12V	3000K 4000K 5500K	180lm 190lm 200lm	12v DC	Tri-Colour Built-in 3.5w SMD LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3271T-BLK-12V	3000K 4000K 5500K	350lm 360lm 370lm	12v DC	Tri-Colour Built-in 6w SMD LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3272T-BLK-12V	3000K 4000K 5500K	600lm 625lm 650lm	12v DC	Tri-Colour Built-in 10w SMD LED


HV3270-BLK

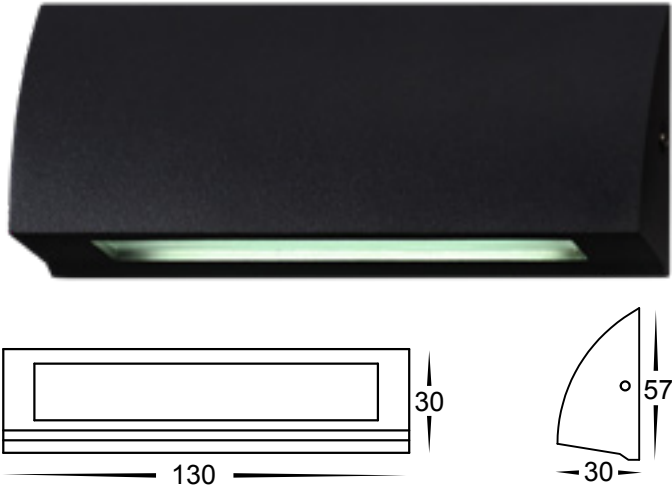

HV3271-BLK

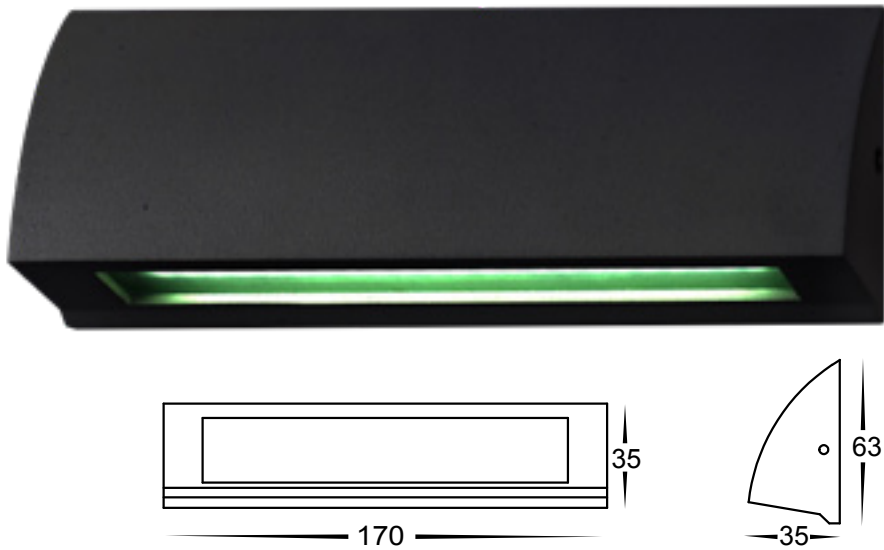

HV3272-BLK

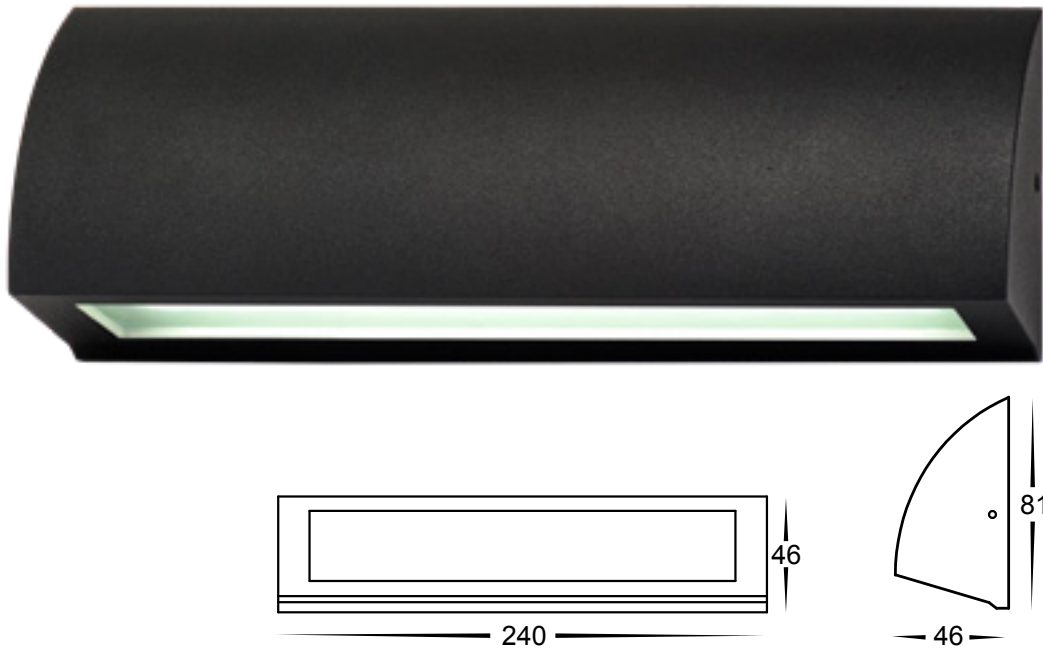

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336