

Taso Aluminium Silver

- Surface mounted step light
- Aluminium Poly Powder Coated Silver
- PC Diffuser
- IP Rating: IP54



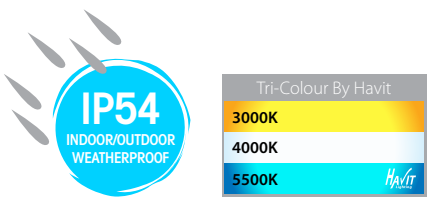


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3270T-SLV-12V	3000K 4000K 5500K	180lm 190lm 200lm	12v DC	Tri-Colour Built-in 3.5w SMD LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3271T-SLV-12V	3000K 4000K 5500K	350lm 360lm 370lm	12v DC	Tri-Colour Built-in 6w SMD LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3272T-SLV-12V	3000K 4000K 5500K	600lm 625lm 650lm	12v DC	Tri-Colour Built-in 10w SMD LED


HV3270-SLV

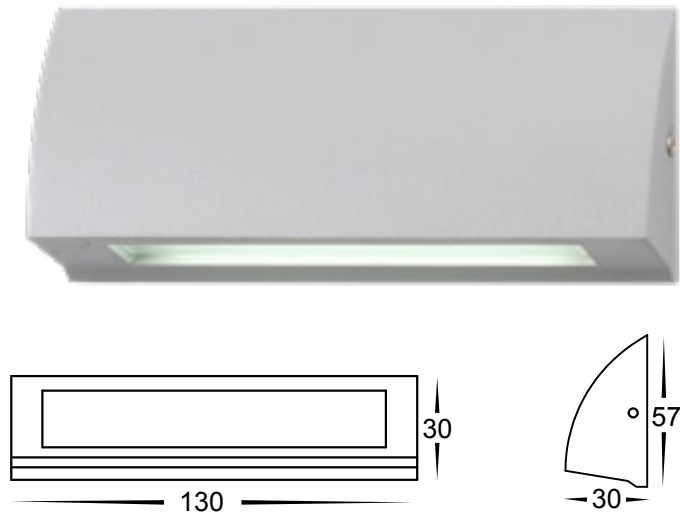

HV3271-SLV

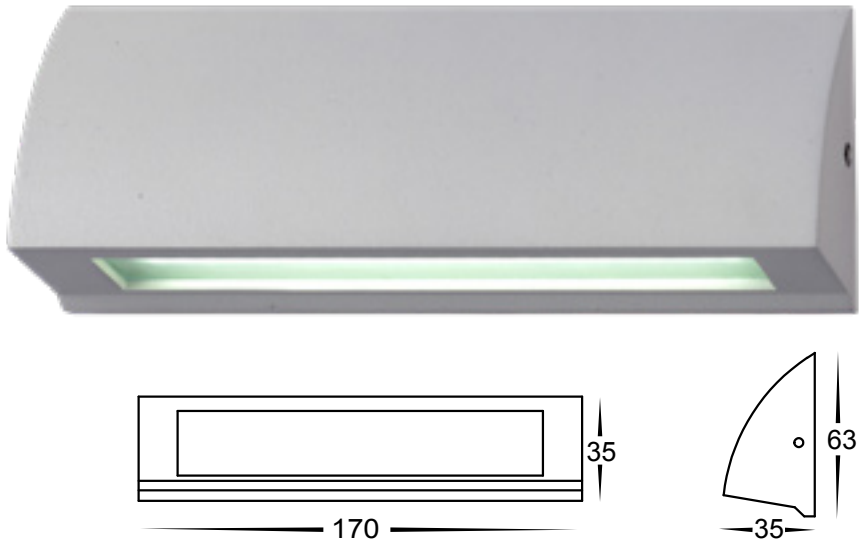

HV3272-SLV

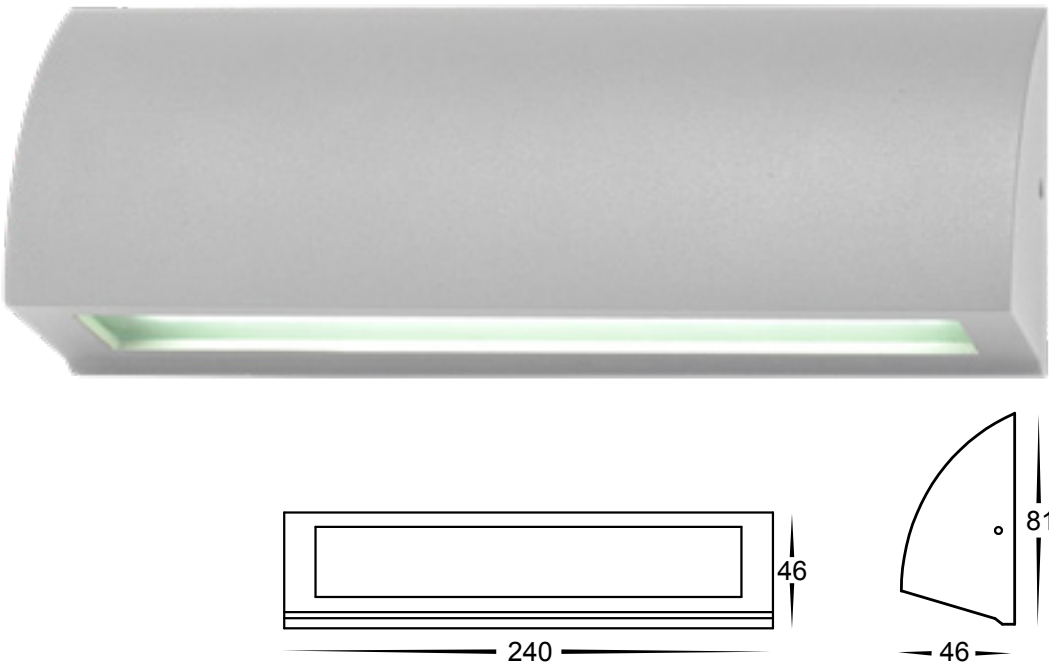

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336