

Taper Stainless Steel White

- Wall wedge
- Stainless Steel Poly Powder Coated White
- Frosted tempered glass
- IP Rating: IP44



Compatible with
Tri-Colour 9in1
3w, 5w, 7w
12v,24v or 240v LED Globe










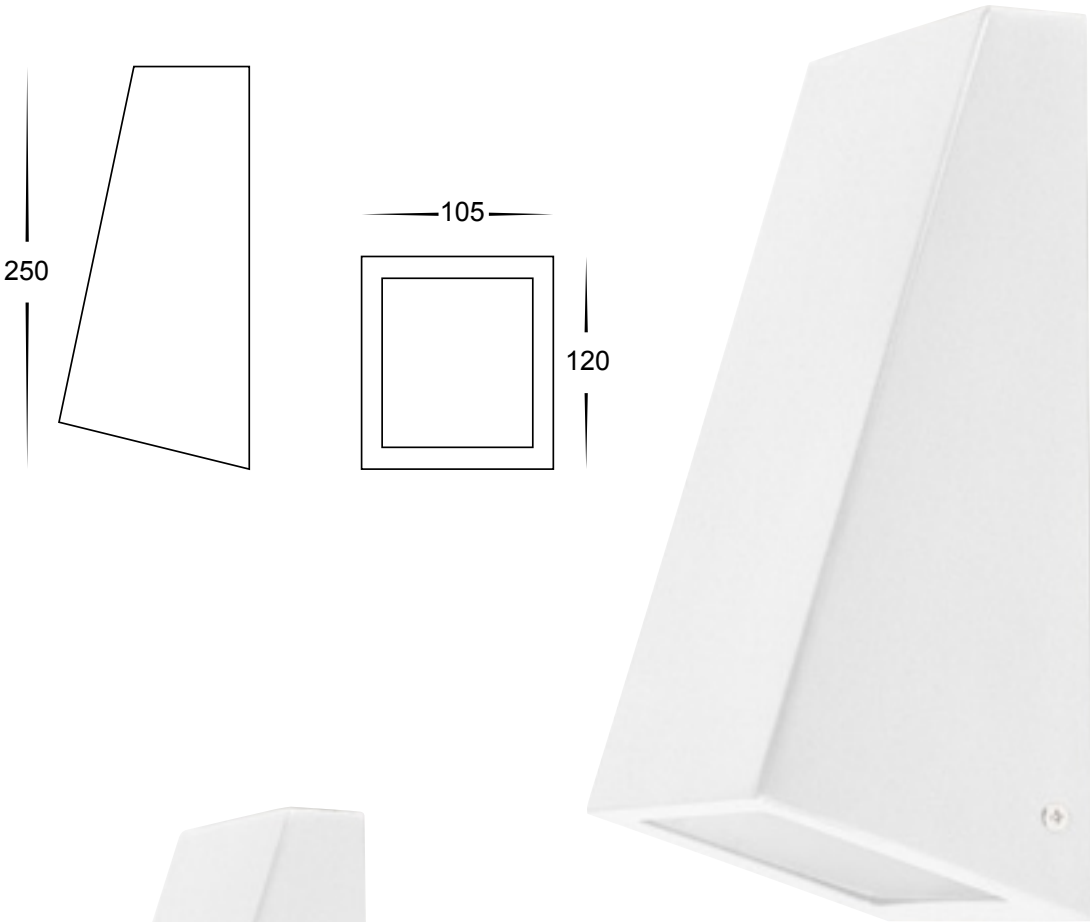


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3601T-WHT	3000K 4000K 5500K	700lm 720lm 740lm	240v	 Tri-Colour 9w E27 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3602T-WHT	3000K 4000K 5500K	270lm 285lm 300lm	240v	 Tri-Colour 5w GU10 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3605T-WHT	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	 Tri-Colour 5w MR16 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3608C-WHT	5500K	110lm	12v DC	 1.5w SMD G4 Bi pin
	HV3608W-WHT	3000k	90lm		

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336





HV3601-WHT



HV3602-WHT/HV3605-WHT



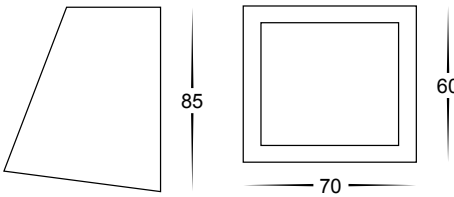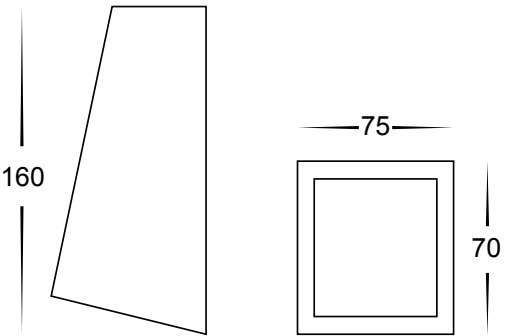HV3608-WHT



All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336