



316 Stainless Steel



316 Stainless Steel Black



316 Stainless Steel White

Veldi

- Square up & down wall pillar light
- 316 Stainless Steel and Powder Coated 316 Stainless Steel
- Tempered glass
- IP Rating: IP54





IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3633T-SS316	3000K 4000K 5500K	2x 270lm 2x 285lm 2x 300lm	240v	Tri-Colour 2x 5w GU10 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3633T-BLK	3000K 4000K 5500K	2x 270lm 2x 285lm 2x 300lm	240v	Tri-Colour 2x 5w GU10 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3633T-WHT	3000K 4000K 5500K	2x 270lm 2x 285lm 2x 300lm	240v	Tri-Colour 2x 5w GU10 LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336



Aluminium Black

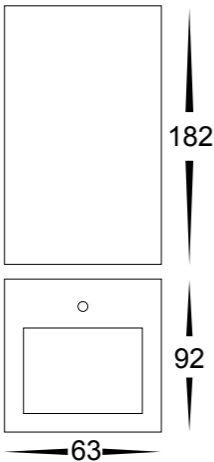

Aluminium White

Platz Aluminium

- Square up & down wall pillar light
- Aluminium Poly Powder Coated
- Tempered glass
- IP Rating: IP54


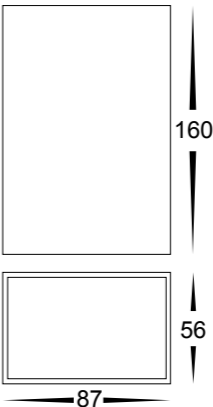


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3634T-BLK	3000K 4000K 5500K	2x 220lm 2x 230lm 2x 240lm	240v	Tri-Colour Built-in 2x 3w LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3634T-WHT	3000K 4000K 5500K	2x 220lm 2x 230lm 2x 240lm	240v	Tri-Colour Built-in 2x 3w LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336