

Lisse Aluminium Black

- Slim wall light
- Aluminium Poly Powder Coated Black
- Tempered glass
- IP Rating: IP54






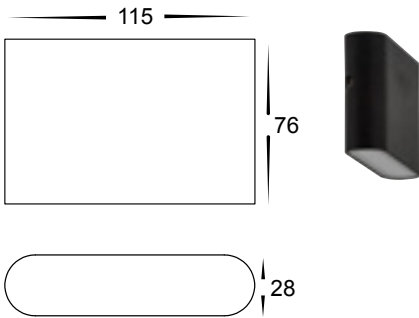



IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV3641T-BLK</b>	3000K 4000K 5500K	240lm 250lm 240lm	240v	<b>Tri-Colour</b> Built-in 4w LED
	<b>HV3641T-BLK-12V</b>	3000K 4000K 5500K	240lm 250lm 240lm	12v DC	
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV3642T-BLK</b>	3000K 4000K 5500K	2x 180lm 2x 187lm 2x 195lm	240v	<b>Tri-Colour</b> Built-in 2x 3w LED
	<b>HV3642T-BLK-12V</b>	3000K 4000K 5500K	2x 180lm 2x 187lm 2x 195lm	12v DC	
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV3643T-BLK</b>	3000K 4000K 5500K	360lm 375lm 390lm	240v	<b>Tri-Colour</b> Built-in 6w LED
	<b>HV3643T-BLK-12V</b>	3000K 4000K 5500K	360lm 375lm 390lm	12v DC	
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV3644T-BLK</b>	3000K 4000K 5500K	2x 300lm 2x 310lm 2x 325lm	240v	<b>Tri-Colour</b> Built-in 2x 5w LED
	<b>HV3644T-BLK-12V</b>	3000K 4000K 5500K	2x 300lm 2x 310lm 2x 325lm	12v DC	





Fixed Down  
HV3641T-BLK

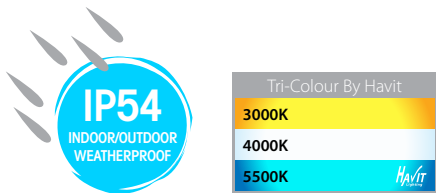


Fixed Down  
HV3643T-BLK

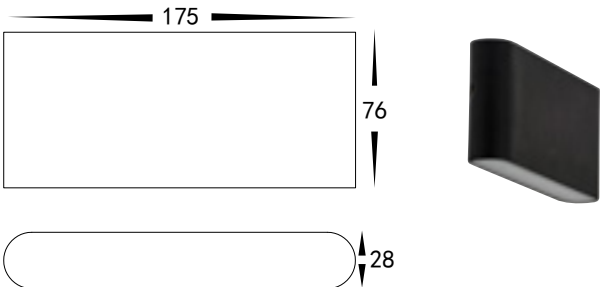

Up & Down  
HV3642T-BLK

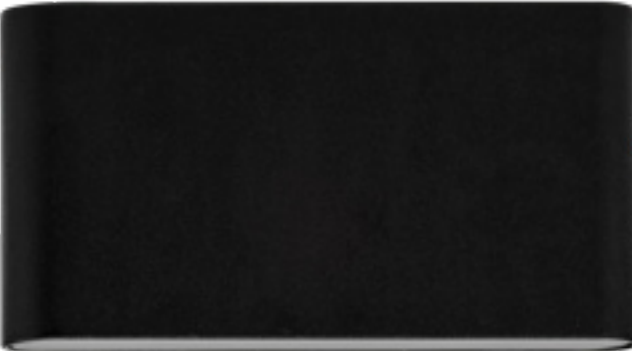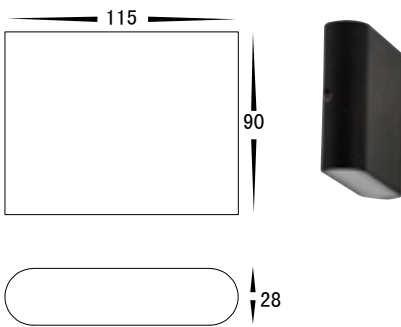

Up & Down  
HV3644T-BLK

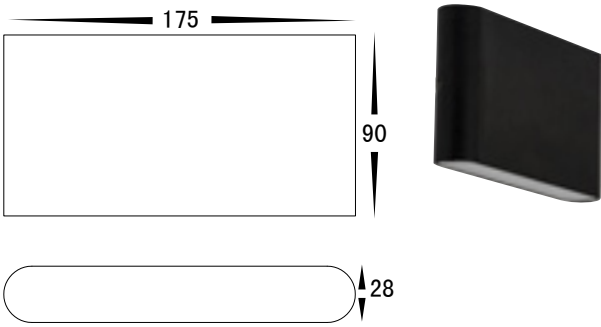

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336