

Revo Aluminium Black

- Single & Double Adjustable wall light
- Aluminium poly powder coated black
- Tempered glass
- IP Rating: IP65

Revo Sensor Aluminium Black

- Double Adjustable wall light
- Aluminium poly powder coated black
- 120° Sensor detection
- Lux and time settings on sensor
- Up to 10 metre detection range
- Tempered glass
- IP Rating: IP65





IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3681T-BLK	3000K 4000K 5500K	810lm 850lm 900lm	240v	Tri-Colour Built-in 9w
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3683T-BLK	3000K 4000K 5500K	2x 810lm 2x 850lm 2x 900lm	240v	Tri-Colour Built-in 2x 9w
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3684T-BLK	3000K 4000K 5500K	2x 810lm 2x 850lm 2x 900lm	240v	Tri-Colour Built-in 2x 9w

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336



Single Adjustable
HV3681T-BLK

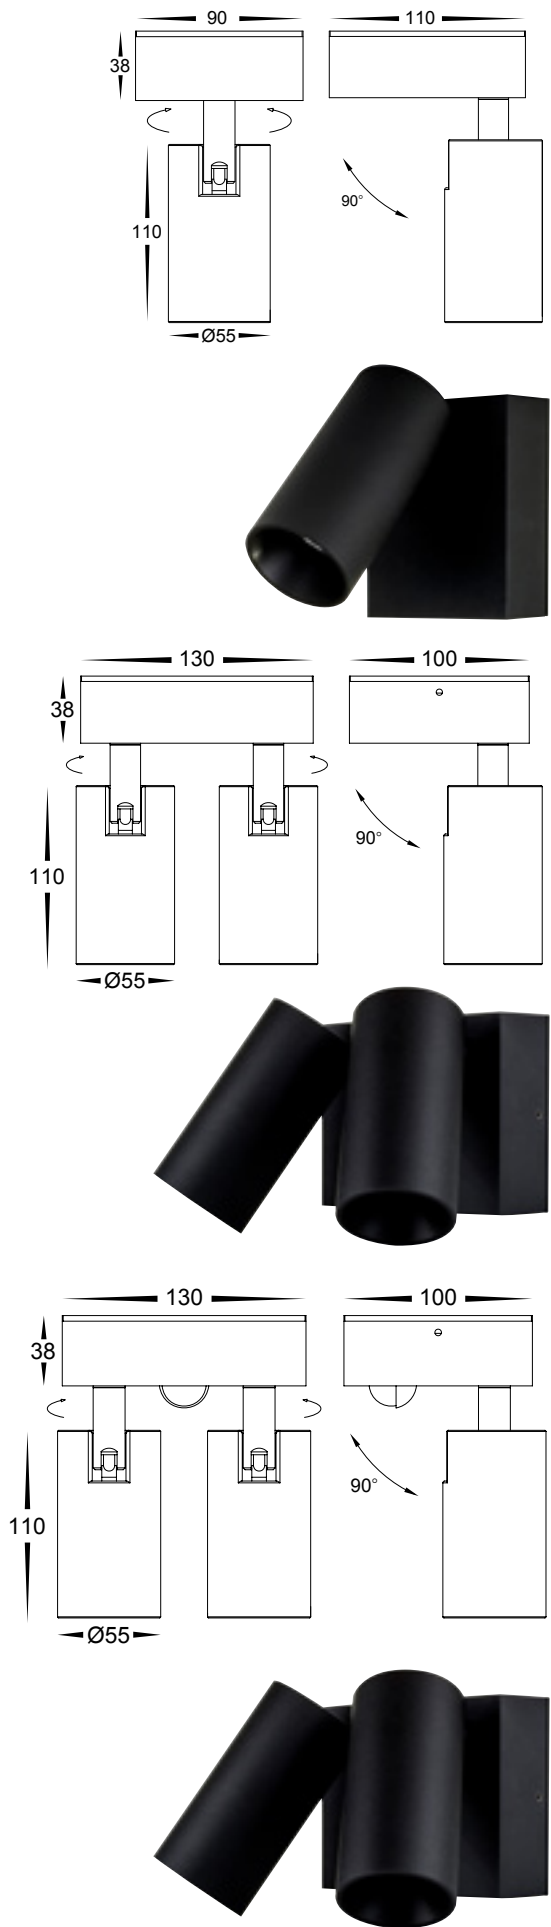

Double Adjustable
HV3683T-BLK



Senor Double Adjustable
HV3684T-BLK

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336