



2 light bar

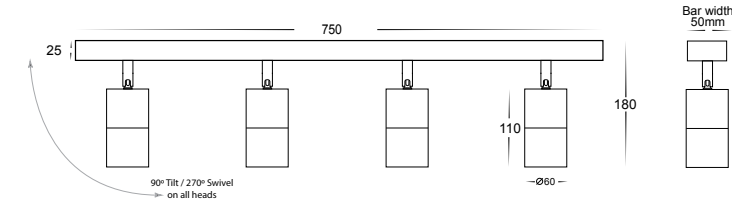


4 light bar

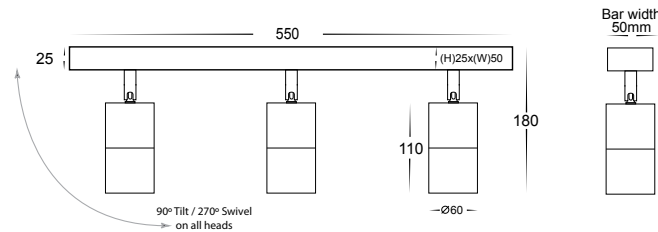


3 light bar



3 light round plate

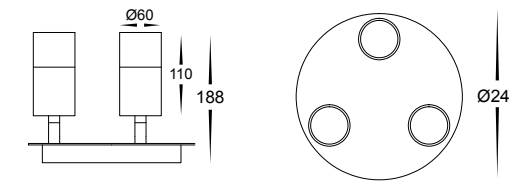

4 light square plate

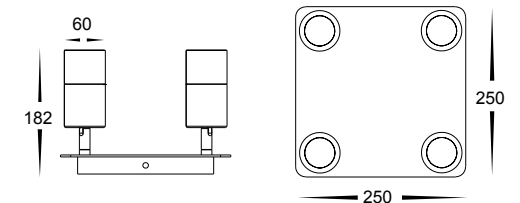

## Tivah Titanium Aluminum

- Adjustable spotlights
- Titanium Coloured Aluminium
- 90° tilt & 270° swivel
- High output reflector to maximise light
- IP Rating: IP54

Compatible with  
**Tri-Colour 9in1**  
**3w, 5w, 7w**  
**LED Globe**  
 HV9506



IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV4001T-2-TTM</b>	3000K 4000K 5500K	2x 270lm 2x 285lm 2x 300lm	240v	<b>Tri-Colour</b> 2x 5w GU10 LED
	<b>HV4001T-3-TTM</b>	3000K 4000K 5500K	3x 270lm 3x 285lm 3x 300lm	240v	<b>Tri-Colour</b> 3x 5w GU10 LED

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV4001T-4-TTM</b>	3000K 4000K 5500K	4x 270lm 4x 285lm 4x 300lm	240v	<b>Tri-Colour</b> 4x 5w GU10 LED
	<b>HV4001T-3-TTM-RND</b>	3000K 4000K 5500K	3x 270lm 3x 285lm 3x 300lm	240v	<b>Tri-Colour</b> 3x 5w GU10 LED
	<b>HV4001T-4-TTM-SQ</b>	3000K 4000K 5500K	4x 270lm 4x 285lm 4x 300lm	240v	<b>Tri-Colour</b> 4x 5w GU10 LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274  
 Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274  
 Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336