


70mm Fixed
HV5511T-WHT



90mm Tilt
HV5512T-WHT

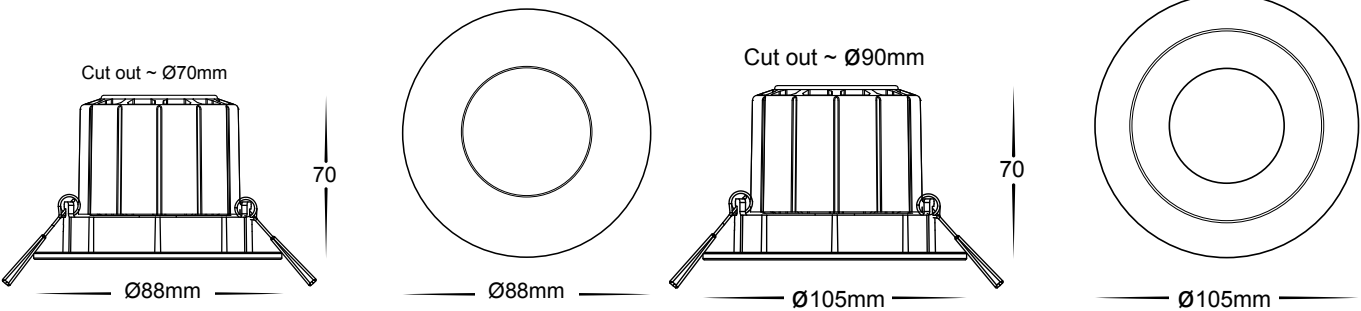

Prime Aluminium White

- Dimmable LED downlights
- Aluminium White
- Supplied with dimmable driver complete with flex & plug
- 45° beam angle
- CRI>90
- IP Rating: IP54

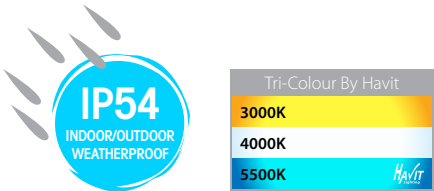


IMAGE	PART NUMBER	CUT OUT	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV5511T-WHT	70mm	3000K 4000K 5500K	980lm 990lm 1000lm	240v	Tri-Colour Built-in 12w LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED	
	HV5512T-WHT	90mm	3000K 4000K 5500K	980lm 990lm 1000lm	240v	Tri-Colour Built-in 12w LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

76mm Fixed Deep
HV5513T-WHT



90mm Fixed Deep
HV5514T-WHT

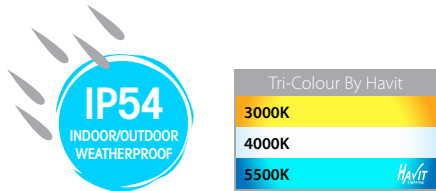
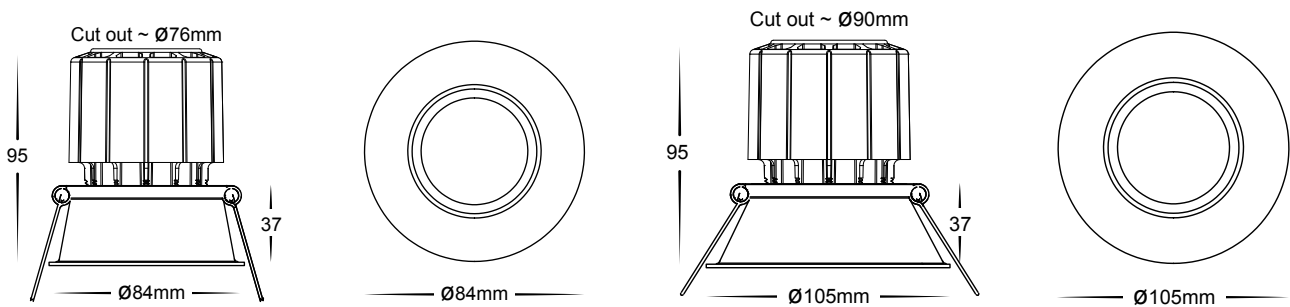


IMAGE	PART NUMBER	CUT OUT	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV5513T-WHT	76mm	3000K 4000K 5500K	980lm 990lm 1000lm	240v	Tri-Colour Built-in 12w LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED	
	HV5514T-WHT	90mm	3000K 4000K 5500K	980lm 990lm 1000lm	240v	Tri-Colour Built-in 12w LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336