




### Polly LED Downlight

- Fixed round LED downlight
- PC matt black or white finish
- Integrated driver
- Supplied with flex & plug
- Cut out: 90mm
- 120° beam angle
- IP54



Tri-Colour By Havit


3000K
4000K
5500K

IMAGE	PART NUMBER	CUT OUT	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV5522T-BLK</b>	90mm	3000K 4000K 5500K	635lm 750lm 715lm	240v	<b>Tri-Colour</b> Built-in 8w LED
IMAGE	PART NUMBER	CUT OUT	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV5522T-WHT</b>	90mm	3000K 4000K 5500K	635lm 750lm 715lm	240v	<b>Tri-Colour</b> Built-in 8w LED



### Gleam LED Downlight

- Fixed round LED downlight
- PC matt black or white finish
- Aluminium heat sink
- Dimmable led driver with flex and plug
- Cut out: 90mm
- 90° beam angle
- IP54

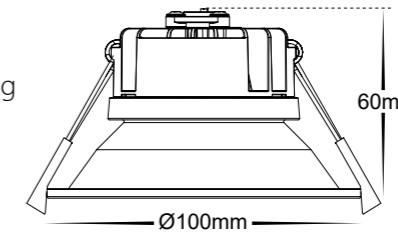

Tri-Colour By Havit

3000K
4000K
5500K

IMAGE	PART NUMBER	CUT OUT	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV5528T-BLK</b>	90mm	3000K 4000K 5500K	680lm 795lm 745lm	240v	<b>Tri-Colour</b> Built-in 9w LED
IMAGE	PART NUMBER	CUT OUT	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV5528T-WHT</b>	90mm	3000K 4000K 5500K	680lm 795lm 745lm	240v	<b>Tri-Colour</b> Built-in 9w LED
IMAGE	PART NUMBER	CUT OUT	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV5528D2W-WHT</b>	90mm	1800K-3000K	685lm	240v	<b>Dim to Warm</b> Built-in 9w LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336