



Ora 316 Stainless Steel

- Fixed round LED downlight
- Stainless Steel 316 Marine Grade cover
- Supplied with dimmable driver complete with flex & plug
- Cut out: 90mm
- 60° beam angle
- IP Rating: IP54



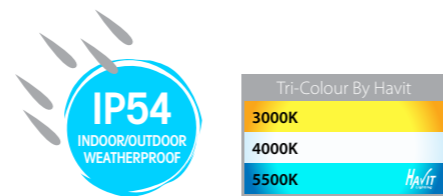


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV5530T-SS316	3000K 4000K 5500K	980lm 990lm 1000lm	240v	Tri-Colour Built-in 12w LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

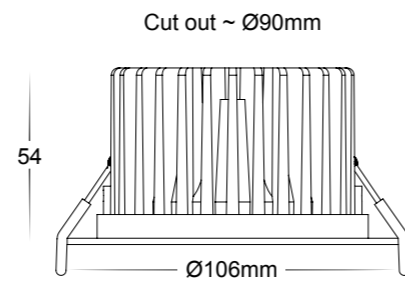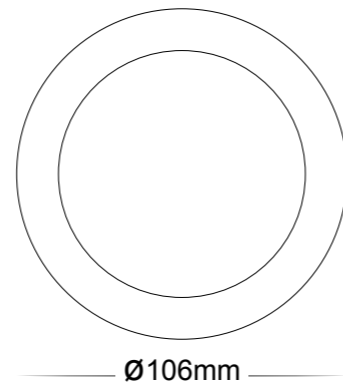

Ora Aluminium

- Fixed round LED downlight
- Aluminium Finish
- Supplied with dimmable driver complete with flex & plug
- Cut out: 90mm
- 90° beam angle
- IP Rating: IP54

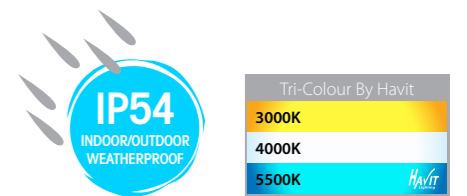
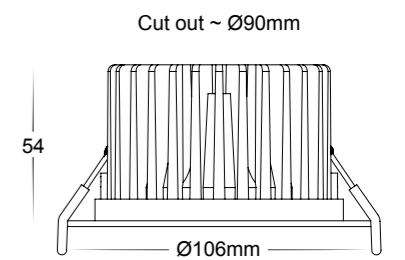
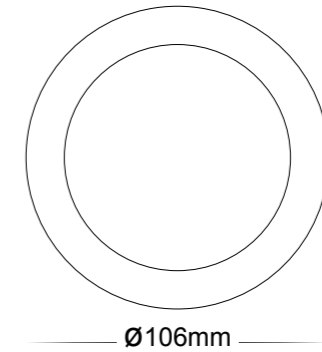


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV5530T-BLK	3000K 4000K 5500K	980lm 990lm 1000lm	240v	Tri-Colour Built-in 12w LED
	HV5530T-WHT	3000K 4000K 5500K	980lm 990lm 1000lm	240v	Tri-Colour Built-in 12w LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336