


NEOLITE Flexible LED Strip

IP67 WEATHERPROOF



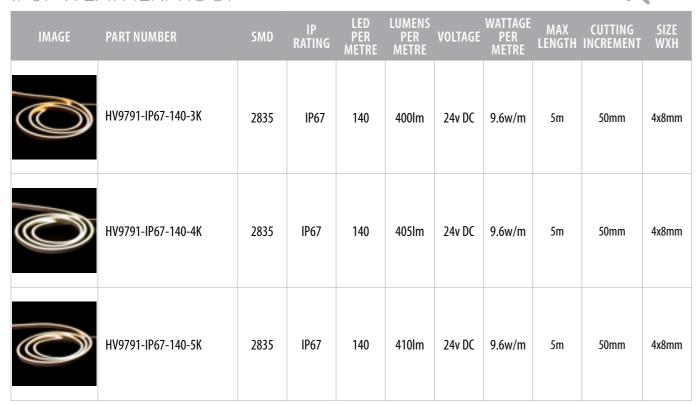

NEOLITE Flexible LED Strip

IP67 WEATHERPROOF

IMAGE	PART NUMBER	SMD	IP Rating	LED PER METRE	LUMENS PER METRE	VOLTAGE	WATTAGE PER METRE	MAA	CUTTING INCREMENT	SIZE WXH
	HV9792-IP67-140-3K	2835	IP67	140	600lm	24v DC	14.4w/m	5m	50mm	6x11mm
	HV9792-IP67-140-4K	2835	IP67	140	630lm	24v DC	14.4w/m	5m	50mm	6x11mm
	HV9792-IP67-140-5K	2835	IP67	140	660lm	24v DC	14.4w/m	5m	50mm	6x11mm



IMAGE	PART NUMBER	SMD	IP Rating	LED PER METRE	LUMENS PER METRE	VOLTAGE	WATTAGE PER METRE	MAX LENGTH	CUTTING INCREMENT	SIZE WXH
	HV9792-IP67-336-RGB	2216	IP67	336	600lm	24v DC	14.4w/m	5m	50mm	6x11mm

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274 Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336