
Lighting by Havit



All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274 Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

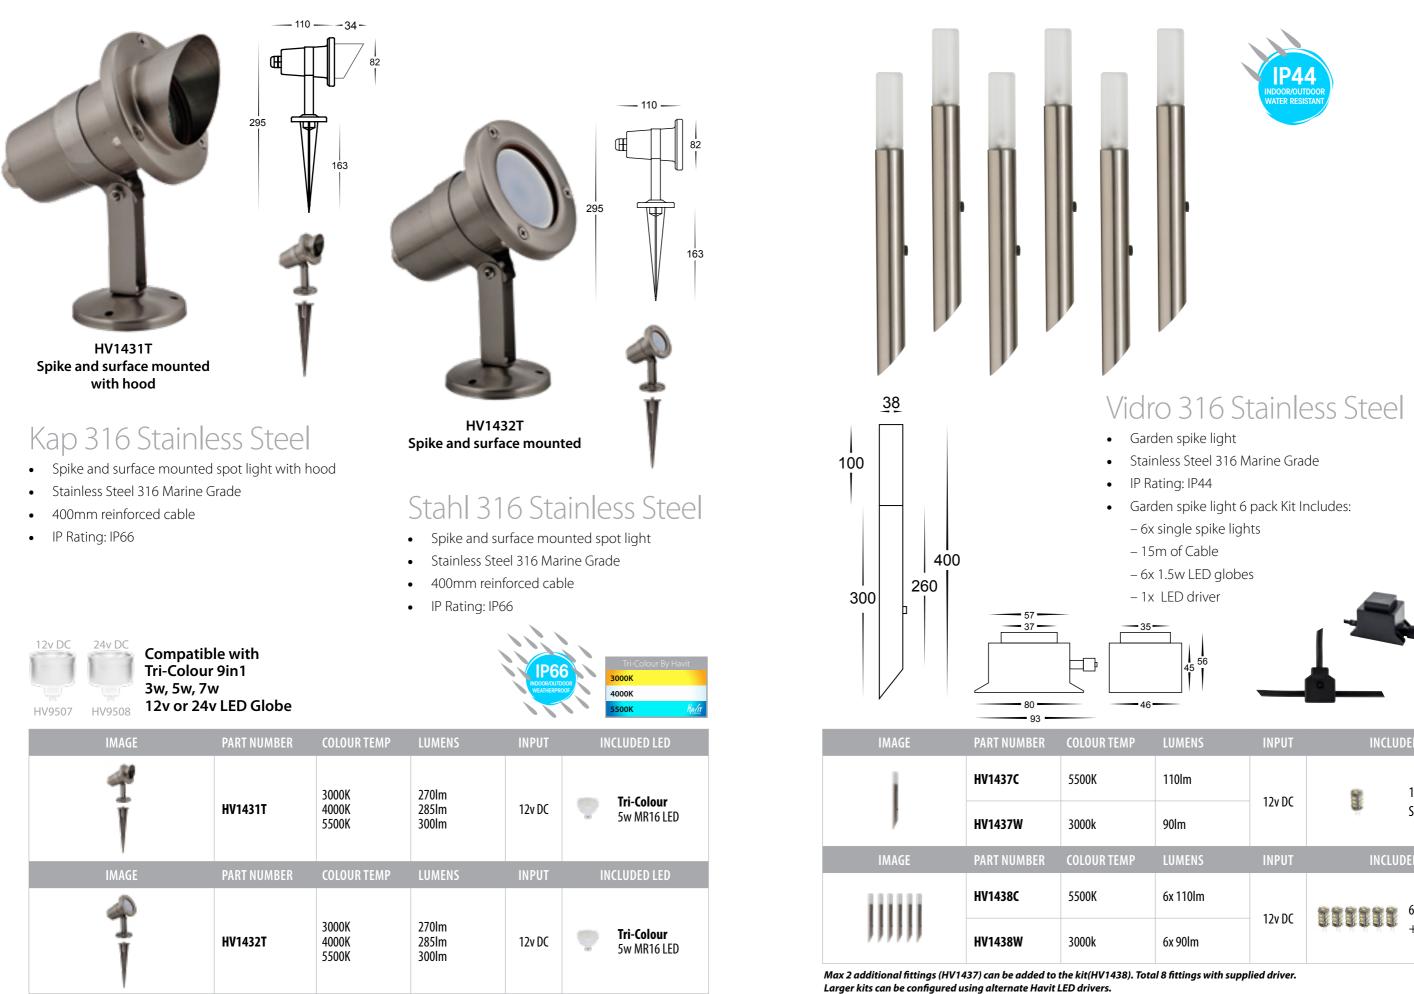

На√іт

UMENS	INPUT	INCLUDED LED	
10lm	12v DC	8	1.5w G4 SMD Bi pin
0lm			
UMENS	INPUT	INCLUDED LED	
x 110lm	12v DC		6 x 1.5w G4 Bi pin + driver
x 90lm			