




Tivah Solid Copper

- Solid Copper body
- Fast weathering for classic aged appearance
- Includes a matching backing plate
- High output reflector to maximise light
- IP Rating: IP65

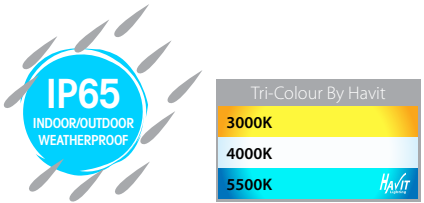

| IMAGE | PART NUMBER | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
|-------|--------------------|-------------------------|--|--------|--|
| | HV1015T | 3000K 4000K 5500K | 2x 240-560lm 2x 255-595lm 2x 270-630lm | 240v | 9 in 1 Tri-Colour 2x 3/5/7w GU10 LED |
| | HV1017GU10T | 3000K 4000K 5500K | 2x 270lm 2x 285lm 2x 300lm | 240v | Tri-Colour 2x 5w GU10 LED |
| | HV1017MR16T | 3000K 4000K 5500K | 2x 270lm 2x 285lm 2x 300lm | 12v DC | Tri-Colour 2x 5w MR16 LED |
| IMAGE | PART NUMBER | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
| | HV1115T | 3000K 4000K 5500K | 240-560lm 255-595lm 270-630lm | 240v | 9 in 1 Tri-Colour 3/5/7w GU10 LED |
| | HV1117GU10T | 3000K 4000K 5500K | 270lm 285lm 300lm | 240v | Tri-Colour 5w GU10 LED |
| | HV1117MR16T | 3000K 4000K 5500K | 270lm 285lm 300lm | 12v DC | Tri-Colour 5w MR16 LED |

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

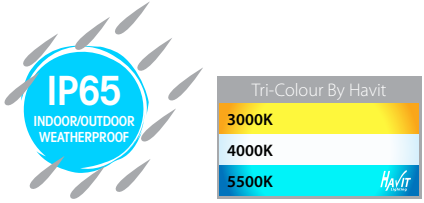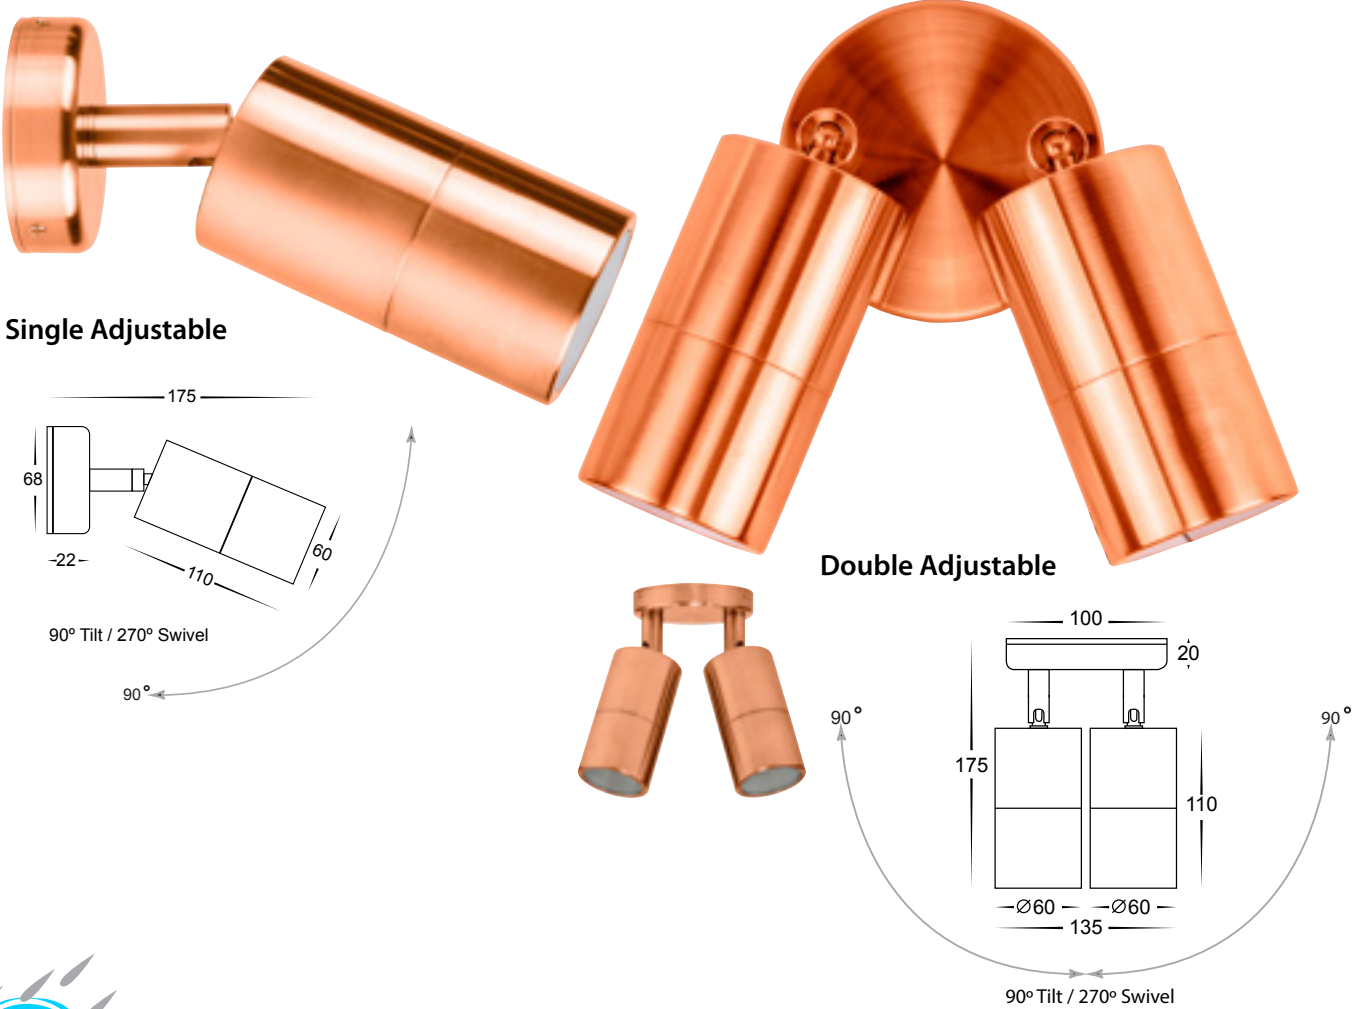

| IMAGE | PART NUMBER | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
|-------|--------------------|-------------------------|--|--------|--|
| | HV1215T | 3000K 4000K 5500K | 240-560lm 255-595lm 270-630lm | 240v | 9 in 1 Tri-Colour 3/5/7w GU10 LED |
| | HV1217GU10T | 3000K 4000K 5500K | 270lm 285lm 300lm | 240v | Tri-Colour 5w GU10 LED |
| | HV1217MR16T | 3000K 4000K 5500K | 270lm 285lm 300lm | 12v DC | Tri-Colour 5w MR16 LED |
| IMAGE | PART NUMBER | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
| | HV1315T | 3000K 4000K 5500K | 2x 240-560lm 2x 255-595lm 2x 270-630lm | 240v | 9 in 1 Tri-Colour 2x 3/5/7w GU10 LED |
| | HV1317GU10T | 3000K 4000K 5500K | 2x 270lm 2x 285lm 2x 300lm | 240v | Tri-Colour 2x 5w GU10 LED |
| | HV1317MR16T | 3000K 4000K 5500K | 2x 270lm 2x 285lm 2x 300lm | 12v DC | Tri-Colour 2x 5w MR16 LED |

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336