



Compatible with
Tri-Colour 9in1
3w, 5w, 7w
12v,24v or 240v LED Globe




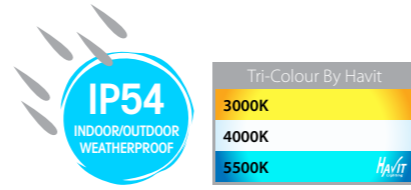


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1601T-SS316	3000K 4000K 5500K	270lm 285lm 300lm	240v	Tri-Colour 5w GU10 LED
	HV1602T-SS316	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED
	HV1601T-BLK	3000K 4000K 5500K	270lm 285lm 300lm	240v	Tri-Colour 5w GU10 LED
	HV1602T-BLK	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED
	HV1601T-TTM	3000K 4000K 5500K	270lm 285lm 300lm	240v	Tri-Colour 5w GU10 LED
	HV1602T-TTM	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED
	HV1601T-AB	3000K 4000K 5500K	270lm 285lm 300lm	240v	Tri-Colour 5w GU10 LED
	HV1602T-AB	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED

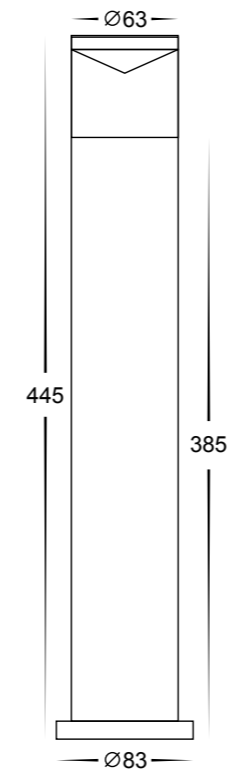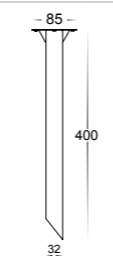


OPTIONAL ACCESSORIES						
	<table border="1"> <tr> <td>HV1603-SS316</td> <td rowspan="4"> <ul style="list-style-type: none"> • Highlite bollard extension • 380mm total extension height • IP Rating: As per fitting used • Up to 2 extensions can be used </td> </tr> <tr> <td>HV1603-BLK</td> </tr> <tr> <td>HV1603-TTM</td> </tr> <tr> <td>HV1603-AB</td> </tr> </table>	HV1603-SS316	<ul style="list-style-type: none"> • Highlite bollard extension • 380mm total extension height • IP Rating: As per fitting used • Up to 2 extensions can be used 	HV1603-BLK	HV1603-TTM	HV1603-AB
HV1603-SS316	<ul style="list-style-type: none"> • Highlite bollard extension • 380mm total extension height • IP Rating: As per fitting used • Up to 2 extensions can be used 					
HV1603-BLK						
HV1603-TTM						
HV1603-AB						
	<table border="1"> <tr> <td>HV1607</td> <td> <ul style="list-style-type: none"> • Bollard spike • High grade stainless steel • 400mm Length • Includes stainless steel base plate </td> </tr> </table>	HV1607	<ul style="list-style-type: none"> • Bollard spike • High grade stainless steel • 400mm Length • Includes stainless steel base plate 			
HV1607	<ul style="list-style-type: none"> • Bollard spike • High grade stainless steel • 400mm Length • Includes stainless steel base plate 					

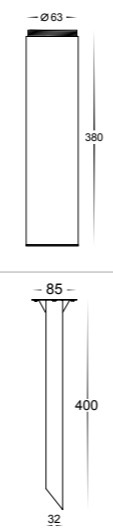

Highlite

- LED bollard light
- High grade perspex reflector lens
- 2m reinforced cable
- 445mm height
- Raised lamp height to maximise light output
- IP Rating: IP54

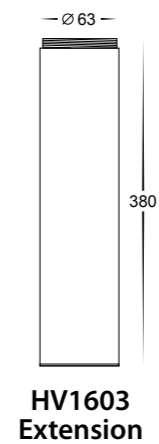

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336