



Compatible with
Tri-Colour 9in1
3w, 5w, 7w
12v or 24v LED Globe


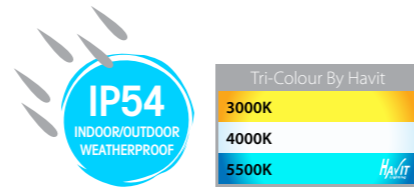


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1605T-BLK-240V	3000K 4000K 5500K	700lm 720lm 740lm	240v	Tri-Colour 9w E27 LED
	HV1605T-BLK-12V	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1606T-BLK-240V	3000K 4000K 5500K	700lm 720lm 740lm	240v	Tri-Colour 9w E27 LED
	HV1606T-BLK-12V	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1608T-BLK-240V	3000K 4000K 5500K	700lm 720lm 740lm	240v	Tri-Colour 9w E27 LED
	HV1608T-BLK-12V	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED
OPTIONAL ACCESSORIES					
	HV1607	<ul style="list-style-type: none"> Bollard spike High grade stainless steel 400mm Length Includes stainless steel base plate 			

Mini & Maxi Stainless Steel Black

- Stainless Steel Poly Powder Coated Black
- Opal diffuser
- 190mm, 600mm & 900mm height
- IP Rating: IP54

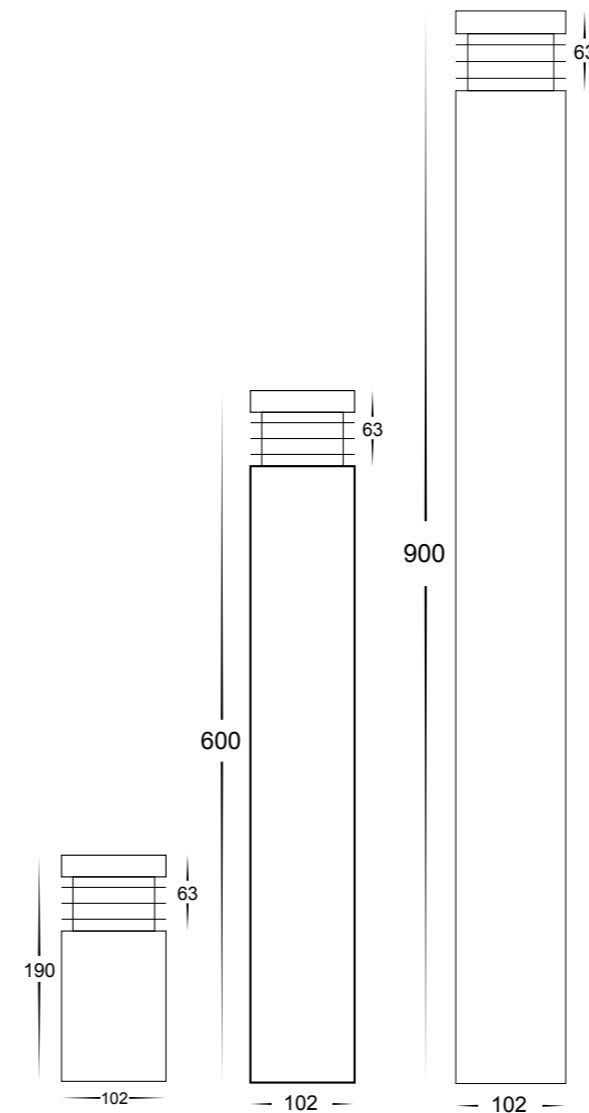

Mini
HV1605T-BLK

Maxi 600
HV1606T-BLK

Maxi 900
HV1608T-BLK

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336