

12v DC

HV9507

24v DC

HV9508

Compatible with

Tri-Colour 9in1

3w, 5w, 7w

12v or 24v LED Globe

IP54

INDOOR/OUTDOOR

WEATHERPROOF

Tri-Colour By Havit

3000K

4000K


5500K

Havit

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1615T-SS316-240V	3000K 4000K 5500K	700lm 720lm 740lm	240v	 Tri-Colour 9w E27 LED
	HV1615T-SS316-12V	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	 Tri-Colour 5w MR16 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1616T-SS316-240V	3000K 4000K 5500K	700lm 720lm 740lm	240v	 Tri-Colour 9w E27 LED
	HV1616T-SS316-12V	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	 Tri-Colour 5w MR16 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1618T-SS316-240V	3000K 4000K 5500K	700lm 720lm 740lm	240v	 Tri-Colour 9w E27 LED
	HV1618T-SS316-12V	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	 Tri-Colour 5w MR16 LED
OPTIONAL ACCESSORIES					
	HV1607	- Bollard spike - High grade stainless steel 400mm Length - Includes stainless steel base plate			

Mini & Maxi Louvre 316 Stainless Steel

- Stainless Steel 316 Marine Grade
- Clear diffuser with louvres
- 190mm, 600mm & 900mm height
- IP Rating: IP54

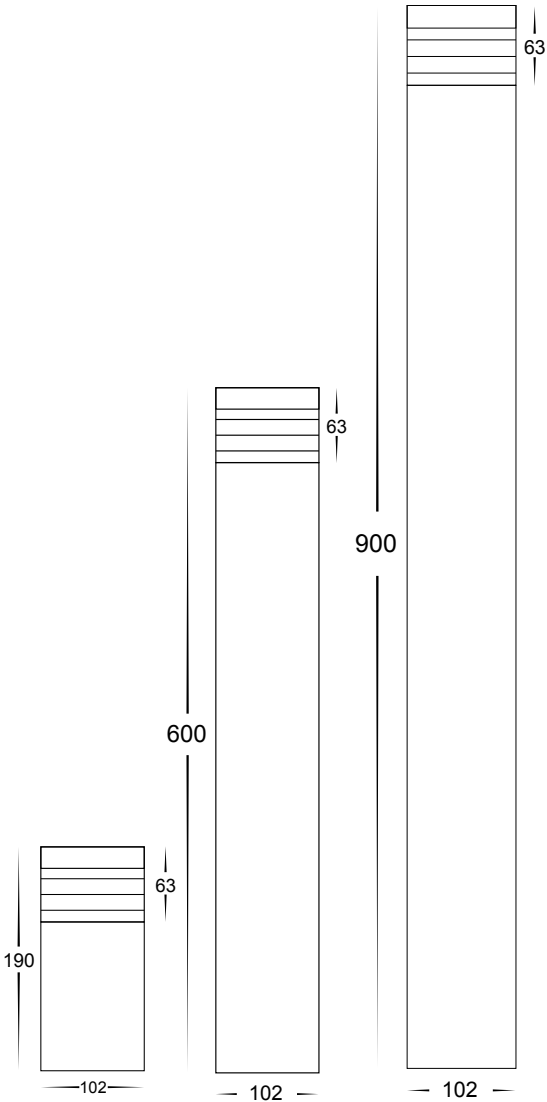

Mini Louvre
HV1615T-SS316

Maxi Louvre 600
HV1616T-SS316

Maxi Louvre 900
HV1618T-SS316

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336