





Metro 316 Stainless Steel

- Inground uplighter square
- Stainless Steel 316 Marine Grade cover
- Flush tempered glass
- Trafficable to 600kg
- Face: 120mm x 120mm
- Installation depth: 155mm
- **NOTE: adequate drainage must be allowed**
- IK Rating: IK08
- IP Rating: IP65

Metro 316 Stainless Steel

- Inground uplighter round
- Stainless Steel 316 Marine Grade cover
- Flush tempered glass
- Trafficable to 600kg
- Face diameter: 120mm
- Installation depth: 155mm
- **NOTE: adequate drainage must be allowed**
- IK Rating: IK08
- IP Rating: IP65

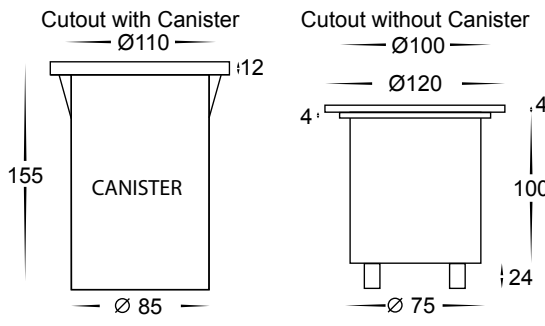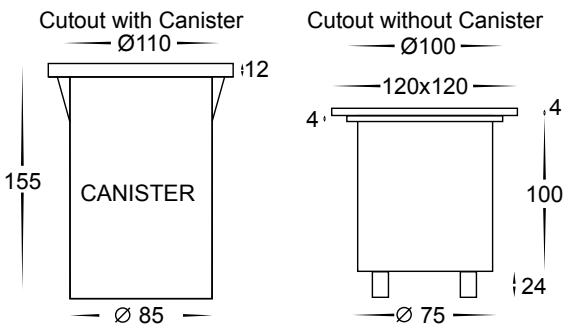

Compatible with
Tri-Colour 9in1
3w, 5w, 7w
12v,24v or 240v LED Globe




IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1701T	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED
	HV1706T	3000K 4000K 5500K	270lm 285lm 300lm	240v	Tri-Colour 5w GU10 LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336



Compatible with
Tri-Colour 9in1
3w, 5w, 7w
12v,24v or 240v LED Globe




IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1801T	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED
	HV1806T	3000K 4000K 5500K	270lm 285lm 300lm	240v	Tri-Colour 5w GU10 LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336