




Split 316 Stainless Steel

- Inground uplighter round
- Stainless Steel 316 Marine Grade cover
- Full stainless steel body
- Anti glare honeycomb louvre
- Beam angle: 60°
- Flush tempered glass
- Trafficable to 1000kg
- Face diameter: 260mm
- Installation depth: 118mm
- **NOTE: adequate drainage must be allowed**
- IK Rating: IK10
- IP Rating: IP67

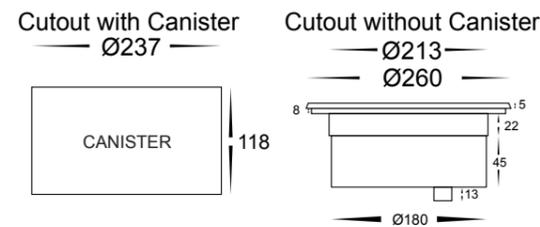

Split 316 Stainless Steel

- Inground uplighter round
- Stainless Steel 316 Marine Grade cover
- Beam angle: 6°
- Flush tempered glass
- Trafficable to 1000kg
- Face diameter: 210mm
- Installation depth: 120mm
- **NOTE: adequate drainage must be allowed**
- IK Rating: IK10
- IP Rating: IP67

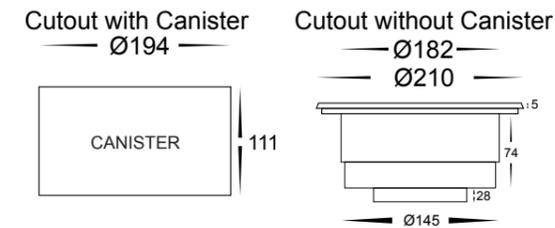


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1845C	5500K	1350lm	12v DC	Built-in 18w
	HV1845W	3000k	1200lm		
OPTIONAL ACCESSORIES					
	HV1845-FSH	Security Face with screw holes to suit HV1845 range			

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1847C	5500K	1900lm	12v DC	Built-in 24w
	HV1847W	3000k	1600lm		
OPTIONAL ACCESSORIES					
	HV1847-FSH	Security Face with screw holes to suit HV1847 range			

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336