











Stainless Steel 316 Black








Cutout with Canister







Ollo

- Recessed wall/step light with eyelid
- Stainless Steel, Solid Copper Or Black Face With Marine Grade 316 Stainless Steel Body
- Tempered glass
- Installation depth needed: 125mm
- Not suitable for in-ground use.
- IP Rating: IP65







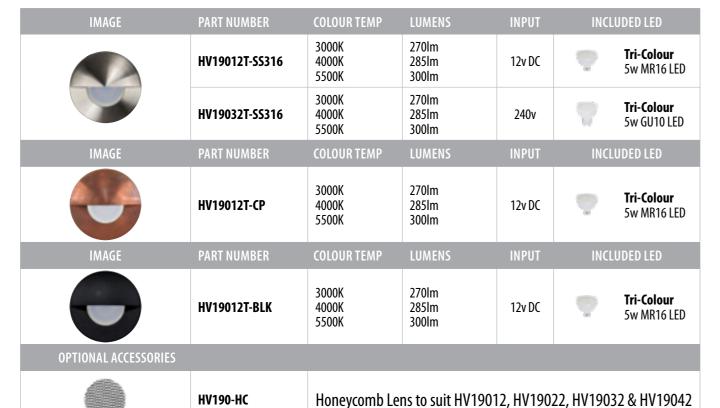






IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCL	JDED LED
	HV19022T-SS316	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	•	<b>Tri-Colour</b> 5w MR16 LED
	HV19042T-SS316	3000K 4000K 5500K	270lm 285lm 300lm	240v	T	<b>Tri-Colour</b> 5w GU10 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCL	JDED LED
	HV19022T-CP	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Ţ	<b>Tri-Colour</b> 5w MR16 LED
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT		
	HV19022T-BLK	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Ţ	<b>Tri-Colour</b> 5w MR16 LED
OPTIONAL ACCESSORIES						
	HV190-HC	Honeycomb Le	ns to suit HV1901	2, HV1902	2, HV1903	2 & HV19042

12v or 24v LED Globe

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274 Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336