



SINCE
BUILDING
THE BEST 1886



Graphite



Chalk White




Industrie IITM

From a loft in London to a gallery in Milan, the Industrie is at home wherever the love of industrially-influenced urban design flourishes. Sleek and minimalist, its impressive blade span moves air with maximum style.


- 24542 Brushed Chrome with three Grey/ Teak blades
- 24545 Graphite with three Graphite/ Chestnut blades
- 24547 Chalk White with three White/ Maple blades



Industrie II™

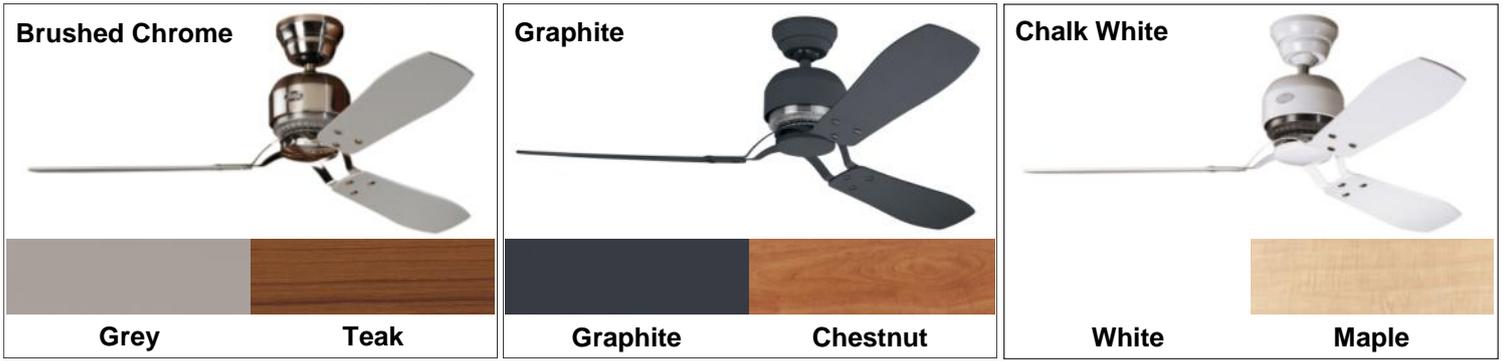

SIZE & BLADES:	132cm (52") Dia. from blade tip to blade tip.				
	Three reversible plywood blades. The blades are reversible with different finishes designed to compliment the motor colour.				
	15 Degree blade pitch.				
MOTOR:	Hunter's patented AirMax™ motor with internal impellers. 16 pole. 172 x 15mm 100Watt motor with heavy gauge copper windings, silicon steel laminations, precision sealed bearings, and multiple cooling fins, all in a rugged die cast aluminium housing.				
CONTROLLER:		Supplied with 3 speed wall control and wall plate for fan operation.			
		• Suitable with Hunter remote controls.			
CANOPY:	Hunter's patented WobbleFree™ canopy with Anti Vibration Technology (AVT) Hunter's patented triangular hanger ball system reduces torque and gives Hunter fans the ability to self-balance, eliminating wobble for rock solid performance, year after year.				
LOCATION:	Indoor use only.				
MOUNTING:	Easy to install in one of 3 mounting positions:				
	<ul style="list-style-type: none"> • Flush mounting on flat ceilings. • Standard mounting on flat ceilings. • Angled mounting on raked ceilings up to 34-Deg. 				
LIGHT KIT:	Suitable for use with Hunter Mandalay light kit.				
FEATURES:	Reversing switch for both summer and winter operation.				
	<ul style="list-style-type: none"> • Save up to 47% on summer cooling costs, • Save up to 24% on winter heating costs. 				
ENERGY STAR:	Energy Star Rated. Proven energy efficient ceiling fan.				
PERFORMANCE:	SPEED	WATTAGE*	RPM	AIRFLOW ** (in M³/HR)	EFFICIENCY (in M³/HR/W)
<i>NB: Performance testing carried out in laboratory approved for energy star testing and certification</i>	HIGH:	70.0	185	10,024	143.20
	MEDIUM:	39.0	139	7,272	186.50
	LOW:	15.7	83	4,146	264.00
	* Wattage for Energy Star data and is based on actual not rated value as shown on rating label				
	** Airflow data tested using Energy Star Solid State Method (Developed by Hunter Fan Company)				

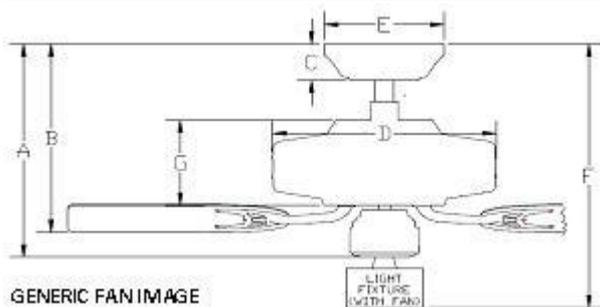

A	B	C	D	E	F	G
STANDARD MOUNT (cm) NB: Using standard downrod.						
33.02	36.65	8.26	19.05	15.75	-	14.48
FLUSH MOUNT (cm) NB: No downrod installed.						
25.83	29.46	8.26	19.05	15.75	-	14.48
ANGLED MOUNT (cm) Using optional 91cm downrod accessory.						
116.84	120.47	8.26	19.05	15.75	-	14.48