



BUILDING THE BEST SINCE 1886



Antique Brass



Brushed Nickel



Bright Brass



White



Savoy™

A great ceiling fan, pure and simple. That's the appeal of the Savoy. A straightforward design uncluttered by fussy details, the Savoy is a chameleon that can top off any décor.

- 24520 Antique Brass with five Rosewood/ Medium Oak blades
- 24521 Brushed Nickel with five Maple/ Cherry blades
- 24524 Bright Brass with five Rosewood/ Oak blades
- 24525 Amber Bronze with five Distressed Cherry/ Mahogany blades
- 24526 White with five White/ Light Oak blades



Savoy™



SIZE & BLADES:

132cm (52") Dia. from blade tip to blade tip.
 Five reversible plywood blades.
 The blades are reversible with different finishes designed to compliment the motor colour.
 12 Degree blade pitch.

MOTOR:

Hunter's patented AirMax™ motor with internal impellers.
 16 pole. 172 x 15mm 100Watt motor with heavy gauge copper windings, silicon steel laminations, precision sealed bearings, and multiple cooling fins, all in a rugged die cast aluminium housing.



CONTROLLER:

Supplied with 3 speed pull chain for fan operation.
 • Suitable with Hunter wall controls.
 • Suitable with Hunter remote controls.



CANOPY:

Hunter's patented WobbleFree™ canopy with Anti Vibration Technology (AVT)
 Hunter's patented triangular hanger ball system reduces torque and gives Hunter fans the ability to self-balance, eliminating wobble for rock solid performance, year after year.




LOCATION:

Indoor use only.

MOUNTING:

Easy to install in one of 3 mounting positions:
 • Flush mounting on flat ceilings.
 • Standard mounting on flat ceilings.
 • Angled mounting on raked ceilings up to 34-Deg.

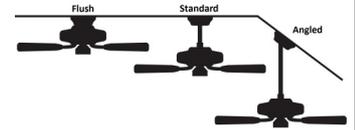


LIGHT KIT:

Suitable for use with most Hunter light kits.

FEATURES:

Reversing switch for both summer and winter operation.
 • Save up to 47% on summer cooling costs,
 • Save up to 24% on winter heating costs.

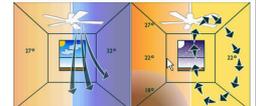

ENERGY STAR:

Energy Star Rated.
 Proven energy efficient ceiling fan.




PERFORMANCE:

NB: Performance testing carried out in laboratory approved for energy star testing and certification

SPEED	WATTAGE*	RPM	AIRFLOW ** (in M ³ /HR)	EFFICIENCY (in M ³ /HR/W)
HIGH:	70.0	200	9,645	137.80
MEDIUM:	47.0	166	7,634	162.40
LOW:	22.0	108	4,925	223.90

* Wattage for Energy Star data and is based on actual not rated value as shown on rating label
 ** Airflow data tested using Energy Star Solid State Method (Developed by Hunter Fan Company)

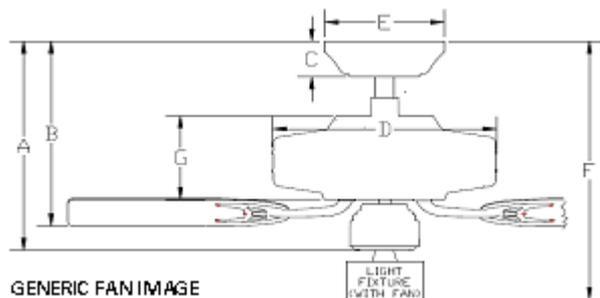

A	B	C	D	E	F	G
STANDARD MOUNT (cm) NB: Using standard downrod.						
31.75	29.21	8.26	30.18	15.75	N/A	12.17
FLUSH MOUNT (cm) NB: No downrod installed.						
24.56	22.02	8.26	30.18	15.75	N/A	12.17
ANGLED MOUNT (cm) NB: Using 91cm downrod.						
115.57	113.03	8.26	30.18	15.75	N/A	12.17