

# Lawn Lite


Cat. No. LL

Cat. No. LLGU



The Lawn Lite is designed for insertion into a lawn or garden bed and can be mowed over without damaging the luminaire. Designed so the lamp can be directed up to 20 degrees at a bush, tree, or the outside of a building, etc. without the need to remove the luminaire from the ground due to the vandal-resistant three stainless steel allen head screw fixing system which attaches the flange to the body of the luminaire. With a 'Flush Fit' lens to stop water pooling and depositing dirt on the lens.

## Ordering Information



Luminaire Type	Flange Option	Body	Accessories
LL - Lawn Lite	BK - Black BZ - Bronze GN - Green STAR - Silver Star WH - White WB - Birch DG - Dark Grey OG - Olive Green RG - Beige PR - Primrose SBZ - Solid Bronze SS - 316 Stainless Steel	Luminaires with a Stainless Steel or Bronze flange have a black body, otherwise body is the same as flange colour.	CJK150 - Cable Joint Kit HCR - Hex Cell Retainer LENSLLF - Frosted Lens GU - GU10 Option  For <b>LED</b> options, refer to page 10.4.3 (6 watt) or 10.4.4 (3 watt) or on our website.



Ordering Example: LL GN - Lawn Lite Green, Flange Body Green

LLGU BK - Lawn Lite GU10 Black, Flange Body Black

LENSLLF - Frosted Lens

(Accessories ordered separately)

**HUNZA**™ PURE OUTDOOR LIGHTING

**HUNZA FACTORY**  
 130 Felton Mathew Ave  
 Glen Innes  
 Auckland 1072  
 New Zealand

Ph: 64-9-528 9471  
 Fax: 64-9-528 9361  
[hunza@hunza.co.nz](mailto:hunza@hunza.co.nz)  
[www.hunza.co.nz](http://www.hunza.co.nz)

**INTERNATIONAL CONTACTS:**  
[www.hunza.co.nz/contacts.php](http://www.hunza.co.nz/contacts.php)

Specifications may change without notice.  
 Manufactured in New Zealand.  
 © 2011 Hunza Holdings Ltd.

Ver 1.4

## Luminaire Construction

### Body:

Cast from virgin high corrosion resistant CC401 low copper aluminium alloy, with chromate substrate and high UV resistant polyester powder coat

**Colours** Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

### Flanges:

The flange is attached to the body by three 316 stainless steel allen head anti vandal screws and is available in either powder coated solid aluminium or CNC machined from one of the following metals:

Solid Bronze - 150mm (6") bar.

Solid 316 Stainless Steel - 150mm (6") rod.

## Mounting

Suitable for insertion into a lawn or gardens etc. mounted level with ground surface, seated on its base.

## Features

### Lens:

12mm (½") 'Flush Fit' clear tempered shatter resistant glass.

Lifetime Warranty.

### Gasket:

Nytrol 220°C (428°F).

### Lamp Holder:

GU5.3 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables. Lamp holder can be rotated 360° and angled up to 20°.

### Accessories:

Cable Joint Kit (Cat. CJK150).  
Not approved for USA/Canada.  
Frosted Lens (Cat. LENSLLF).  
Hex Cell Retainer (Cat. HCR).  
GU10 Option (Cat. GU).

## Standards

Ip67



UL1838

## Luminaire Weight

ALUM .94kg (2lbs 1oz)  
SOLID BRZ 1.14kg (2lbs 8oz)  
SS 1.13kg (2lbs 7oz)

## Power Supply

HUNZA™ Inground or Wall Mount  
Transformer: not included.

## USA and Canada:

HUNZA™ Wall Mount Transformer:  
not included.

## Luminaire: supplied with










MR16 GU5.3 20 or 35 watt lamp max.  
GU10 - GU10 25 or 35 watt lamp max.

**LED** - Refer to previous page.

## USA and Canada:

MR16 GU5.3 20 watt lamp max.  
GU10 Halogen - Lamp not supplied

**LED** - Refer to previous page.

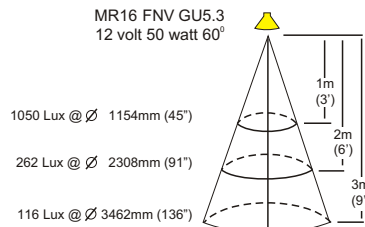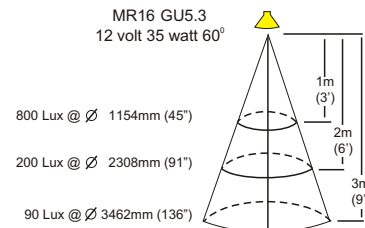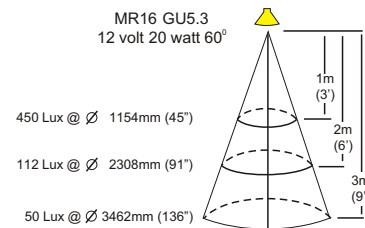

**HUNZA™** PURE OUTDOOR LIGHTING

**HUNZA FACTORY**  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

**INTERNATIONAL CONTACTS:**  
www.hunza.co.nz/contacts.php

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2011 Hunza Holdings Ltd.

Ver 1.4