


Twin Pole Lite

Cat. No. TPL
 Cat. No. TPL/R
 Cat. No. TPLGU
 Cat. No. TPLMH20
 Cat. No. TPLMH35

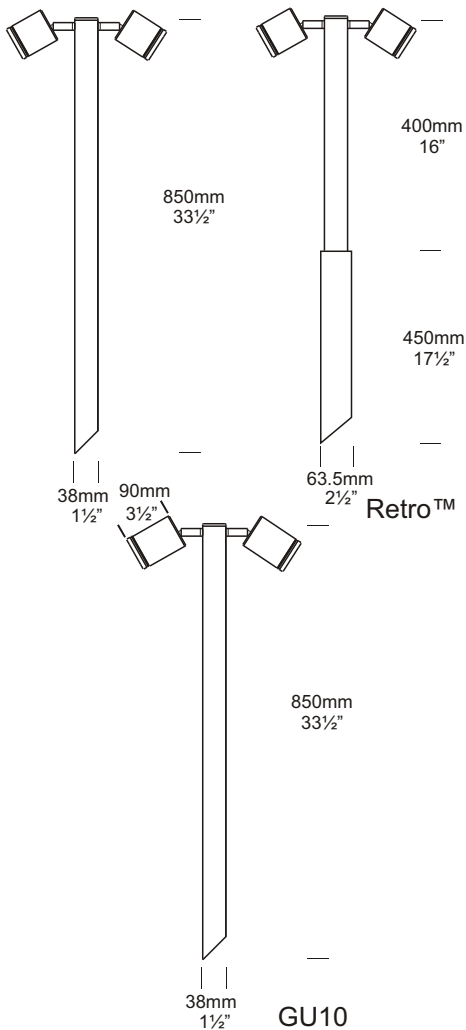

The Twin Pole Lite is ideal for path lighting as well as tree lighting, or the heads may be aimed downward to eliminate vertical light. The fixture has two individual spotlights which can be aimed in two entirely different directions. Each lite has fully adjustable arms allowing 360 degree rotation and 0 - 90 degree elevation.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer this changes the luminaire to an IP56 rating.

A GU10 version of this luminaire is also available for line voltage lamps. However, two longer luminaire bodies are needed to accommodate the longer lamps. The Twin Pole Lite Metal Halide is extremely energy efficient, outputting 2-3 times the light of a halogen

Ordering Information

Luminaire Type	Material/Finish	Accessories
TPL - Twin Pole Lite	BK - Black BZ - Bronze GN - Green STAR - Silver Star WH - White WB - Birch DG - Dark Grey OG - Olive Green RG - Beige PR - Primrose COP - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit LENSSTEPF - Frost Lens GG - Glare Guard (Not for Metal Halide) HCL - Hex Cell Louvre Adaptor /R - Retro™ Transformer 110/240-12 volt GU - GU10 Option MH - Metal Halide Option
		For LED options, refer to page 10.4 (dedicated LED), 10.4.3 (6 watt), 10.4.4 (3 watt) or http://hunza.co.nz/l.html



Twin Pole Lite
 Metal Halide version
 63.5mm diameter pole

Ordering Example: TPL SS - Twin Pole Lite in 316 Stainless Steel

- TPL/R COP - Twin Pole Lite Retro™ in Copper
- TPLGU COP - Twin Pole Lite GU10 in Copper
- TPLMH20 BK - Twin Pole Lite Metal Halide 20 watt in Black
- HCL - Hex Cell Louvre Adaptor
 (Accessories ordered separately)

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
 130 Felton Mathew Ave
 Glen Innes
 Auckland 1072
 New Zealand

Ph: 64-9-528 9471
 Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
 Manufactured in New Zealand.
 © 2011 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat - Colours Black, White, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Copper: 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

316 Stainless Steel: 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Poles: Aluminium, Copper, 316 Stainless 38mm (1½") x 850mm (33½") tube.

Retro™ Pole: 38mm (1½") x 410mm (16") tube.

Transformer Pole: 63.5mm (2½") x 440mm (17½").

Mounting

Pole 850mm (33½") directly mounted into the earth. Retro™ - set in concrete.

Features

Lens:
7mm (¼") clear flush fit shatter resistant glass. Lifetime Warranty.

Gaskets:
Silicone, iron impregnated 220°C (428°F).

Lamp Holders:
GU5.3 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Metal Halide GX10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:
Cable Joint Kit (Cat. CJK150)
Not approved for USA /Canada.
Frosted Lens (Cat. LENSSTPEF).
Glare Guard (Cat. GG).
Hex Cell Louvre Adaptor (Cat. HCL).
Retro™ transformer 110/240-12 volt (Cat. /R) IP56.

GU10 Option (Cat. GU).
Metal Halide Option (Cat. MH).

Swivels:
Aluminium and Copper luminaires 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP56/IP66  UL1838

Luminaire Weight

12 volt: Alum 1.200kg (2lb 10oz)
Cop 3.500kg (7lb 7oz)
SS 2.800kg (6lb 2oz)
Retro™: Alum 2.300kg (5lb 1oz)
Cop 4.300kg (8lb 9oz)
SS 3.600kg (7lb 11oz)

Power Supply

HUNZA™ Inground or Wall Mount
Transformer: not included.
Metal Halide - 230-240 volt ac 50Hz
built in ballast

RETRO™ IP56

HUNZA™ 110/240-12 volt ac
potted electronic transformer is
built into the pole. Dimmable with a
suitable dimmer.

USA and Canada:

HUNZA™ Wall Mount Transformer: not
included.

Metal Halide - 120 volt ac 60Hz
built in ballast

Luminaire: supplied with

MR16 GU5.3 2 x 20, 35 watt lamp max.
Retro™ MR16 GU5.3 20, 35, 50 watt
Lamps max.










GU10 - GU10 25 or 35 watt lamps max.
LED - Refer to previous page.

Metal Halide - GX10 20 or 35 watt lamps

USA and Canada:

MR16 GU5.3 2 x 20 watt lamp max.
35 watt lamp max with glare guard fitted
GU10 Halogen - Lamps not supplied
LED - Refer to previous page.

Metal Halide - GX10 20 or 35 watt lamps



HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4