

Firestop LED fireproof downlight kit

LUSION Firestop is suitable for many general lighting applications. Its IP65 rating makes it particularly suitable for use in bathrooms, hallways, corridors and stairwells, and most commercial common areas where a low glare energy efficient lighting solution is required.




- IP65
- Latest LED COB Chip technology
- High temperature resistant die cast aluminium heat sink
- Complete with pre wired electronic LED Driver
- Quick and easy installation ceiling mounting clips
- Slim flush trim
- 50,000 hours rated average life
- CRI > 80
- Power factor > 0.9
- Intelligent thermal control with automatic recovery
- Short circuit / over current / over voltage protection
- Dimmable
- 3 year warranty

Compliance

- AS/NZS60598.2.1 2013
- AS/NZS60598.2.2 2001
- AS/NZS CISPR15:2011
- AS1530.4 20014 for Fire resistance
- BS476 for 30,60,90 minute fire rated ceiling materials.

Photometric Curve

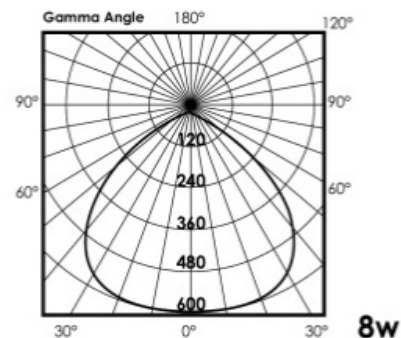

Product Code	Alpha Code	Watt	Colour Temp.	Lumens	Life (Hours)	Dimensions (w x h)	CRI	Beam Angle	IP Rating	Dimmable
50501	LFS8W3KD	8w	3000k	640lm	50,000	87.5 x 65mm Cut-out: 64mm	80	60°	IP65	Yes

