

PGL1300BK PGL1300BZ PGL1301BK PGL1301BZ

MATERIAL / FEATURES

Cover:

- Heavy Duty Cast Aluminium Covers
- Stainless Steel Screws
- Heat Resistant Glass Lens
- EPDM Rubber Gasket


Body

- Injection Moulded Poly Glass Body - Black
- Water Tight Wire Connector (underside)
- 25° Adjustable Bracket provides interior tilt for lamp
- Resistant Powder Coat Finish – Aluminium



SPECIFICATIONS

- 12 Volt Fixture
- 3' - #18/2 Direct Bury Landscape Lighting Wire
- Hi-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- Globe required – MR16 50W Max
- IP Rating: IP65

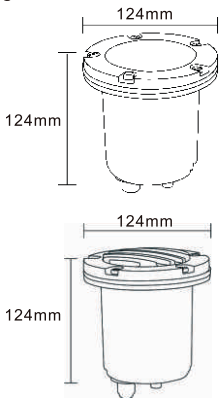

PGL1300BK



PGL1300BZ



PGL1301BK



PGL1301BZ

PART NUMBER	Colour	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
PGL1300BK/BZ	Black/ Bronze				No globes supplied
PGL1301BK/BZ	Black/ Bronze				No globes supplied
PGL1300BK/BZ- PLXC5	Black/ Bronze	2700K	400	12V AC/DC	5W MR16 PLXC5-MR16-FL-27K
PGL1301BK/BZ- PLXC5	Black/ Bronze	2700K	400	12V AC/DC	5W MR16 PLXC5-MR16-FL-27K