

# 10W 3A-DL1365 TC




- New generation SMD LED chip
- Dimmable range 3%-100%
- IC-4 recessed luminaire, lower fire hazard risk
- Pre-set tri-color-temperature switch for diverse needs

## FEATURES


1. Long life, average 40,000Hours
2. Dimmable with trailing edge and universal dimmer
3. High efficiency LED chip and translucent diffuser
4. Polycarbonate body
5. Easy installation
6. Three year replacement warranty




### 3000K SDCM: 4.433

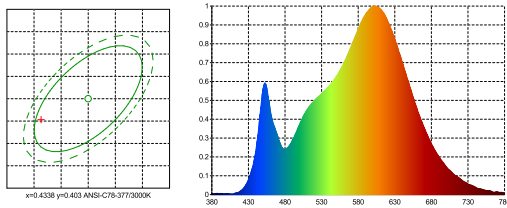

### 4000K SDCM: 3.184


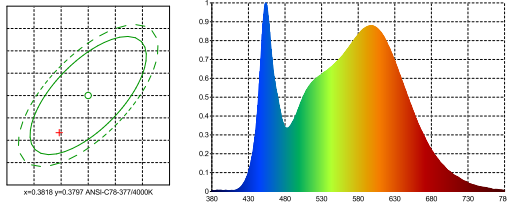


### 5000K SDCM: 5.239

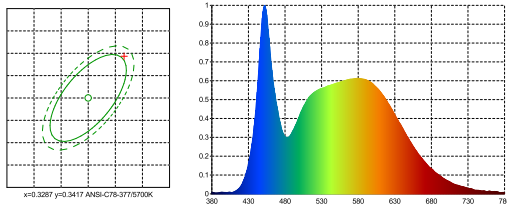

|             |                          |
|-------------|--------------------------|
| Model       | 3A-DL1365 TC             |
| Voltage     | AC200-240V 50/60Hz       |
| LED         | SMD LED                  |
| Lifespan    | >40,000Hrs               |
| Cut-out     | Ø88-95mm                 |
| Dimension   | Ø110*H38mm               |
| Warranty    | 3 years                  |
| Packaging   | L135*W135*H50mm          |
| Carton      | 30pcs/CTN                |
| Carton Size | L42.5*W29*H27.5CM        |
| Weight      | N.W: 6.3kg<br>G.W: 8.3kg |

Use the pre-set switch to set color temperature before installation.



## SPECIFICATION

| Power | Model            | Fitting Color | CRI | Beam Angle | CCT                   | FLUX        | Dimmable |
|-------|------------------|---------------|-----|------------|-----------------------|-------------|----------|
| 10W   | 3A-DL1365 WH TC  | White         | >80 | 120°       | 3000K-4000K<br>-5000K | 670lm-775lm | yes      |
| 10W   | 3A-DL1365 BK TC  | Black         | >80 | 120°       | 3000K-4000K<br>-5000K | 670lm-775lm | yes      |
| 10W   | 3A-DL1365 SCH TC | Santin Chrome | >80 | 120°       | 3000K-4000K<br>-5000K | 670lm-775lm | yes      |