


SURFACE MOUNT LED EMERGENCY LIGHT

SP-3002 is designed as a compact non-maintain surface mount LED emergency light allowing 3 hours minimum lighting after mains failure.

Usage: widely used in modern hotels,shops and other public places,security evacuation and guide.



Item code	SP-3002
Input Voltage	220-240AC
Frequency	50/60Hz
Battery	4.8V Ni-MH
Charge time	24hours
Discharge time	3 hours
Operating Temp	0°C~+40°C
IP Grade	IP20
Material	Retardant Plastic
Size	show as below
Charging Power	3W
DC power	1.7W
Emergency lumen	140lm
classification	C0:D25 C90:25
LED Lifespan	>50,000 hours
Color	White
Work mode	NON-maintain
Indicator	red-charging
Protection	Over-charge /over-discharge
Mounting	Ceiling or wall mount
cable	No,only AU connectors
Standard	AS/NZS 2293 IEC 60598-2-22

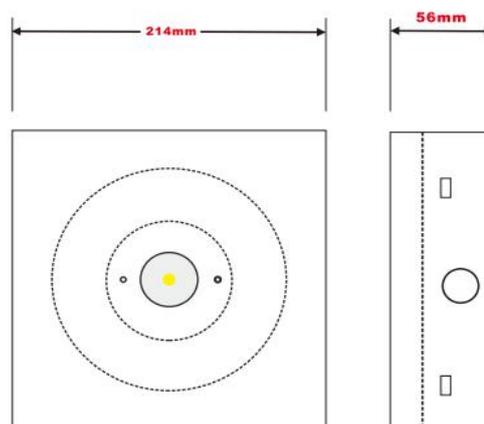

Model No.	classification	Operation	Charging mode	Discharging duration	Emergency mode battery	DC power	Output lumen
SP-3002-WH	D25	Non-maintain	3W	180min	NI-MH 4.8V1800MAH	1.7W	140lm
SP-3002-BK	D25	Non-maintain	3W	180min	NI-MH 4.8V1800MAH	1.7W	140lm



Ta 0°C-40°C



Tested By **Nemko**

Certified By **SAA**
APPROVALS
AS/NZS 2293 CERTIFIED