Skylite 150

VBLFP-BL-606-1-CCT90

| 50,000H | IP20 | Non-Dimm |

Our 36W 595x595mm LED Backlit Panel is part of our SKYLite 150 Series. With 3CCT, you have the option to choose from 3000K (3758.5lm) 4000K (3605.2lm) or 5000K (3773.2lm). Offering a sleek, modern style, these lights are a great option when seeking replacement for Fluorescent Troffers, or even in domestic applications where a skylight panel would suit - install these instead! This series boasts a range of sizes to fit most applications and bears a low glare (UGR<19) with the CRI90 option. This is great for offices where glare on screens should be avoided. Includes a 50,000 hour lifespan and 3 year warranty.
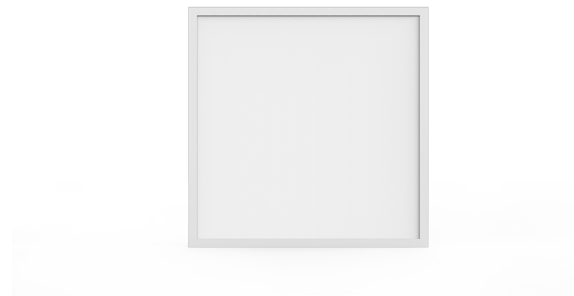
Features & Benefits

• High colour rendition CRI>90
• Low glare (UGR<19) film on CRI90 models only
• Energy saving up to 60% when compared with fluorescent tubes
• 3CCT changeable - 3000K/4000K/5000K
• Equipped with high efficiency SAMSUNG SMD LED chips
• Direct replacement for fluorescent fittings
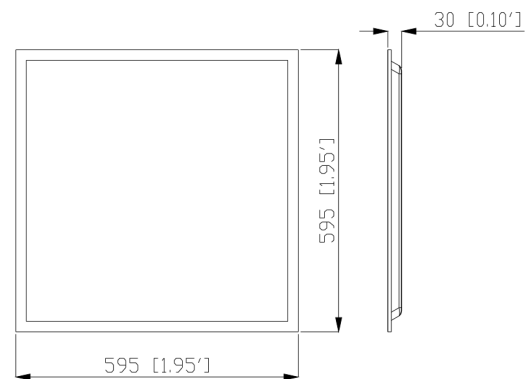• 50,000 hours lifespan
• 3 years warranty

Specifications

SKU	VBLFP-BL-606-1-CCT90
Luminaire efficacy	94.4 lm/W
EAN	9340994022741
Light Colour	3CCT
Wattage	36 W
Lumen output	3400 lm
IP rating	20
CRI	90
Beam Angle	110 Degrees
Cut out	595x595 mm
Length	595 mm
Height	595 mm
Lifespan	50000 Hours
Warranty	3 Years
Dimmable	Non-Dimmable
Mounting type	Recessed, Surface
LED source	SMD
Lamp Type	LED
Input voltage	220V-240V AC 50HZ
Wiring method	Flex & Plug
Weatherproof	Indoor Use Only
Working temperature	-20-45 degrees
Box Qty	6
Kelvin	3000K, 4000K, 5000K

Photometric information available upon request.

Dimensional Drawings

30 [0.10']

595 [1.95']

595 [1.95']

VIBE LIGHTING
quality · innovation · value